



Rev.	Description.	Date	App.
01			

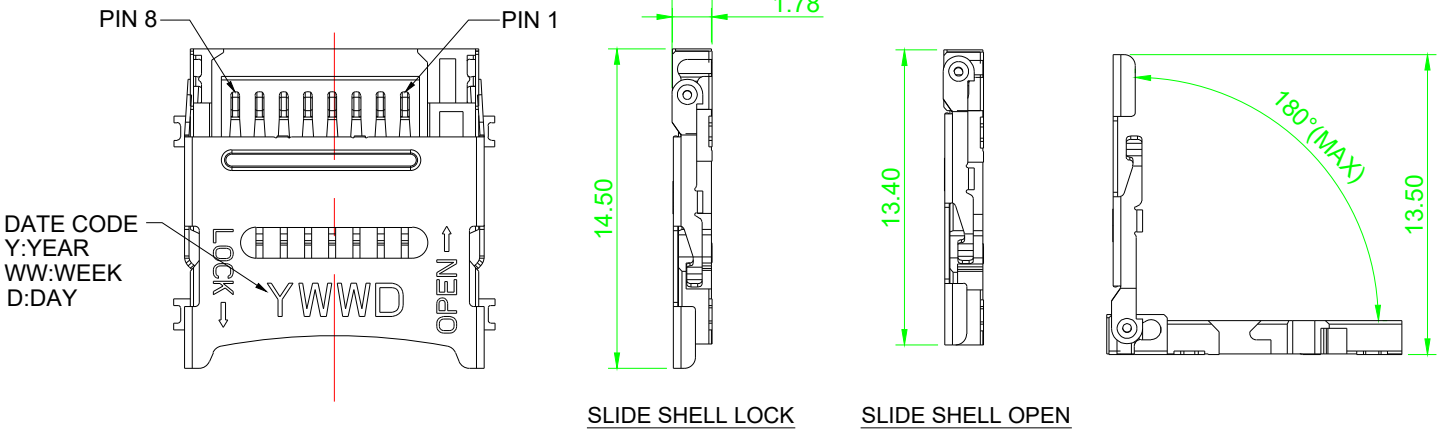

SLIDE SHELL LOCK SLIDE SHELL OPEN

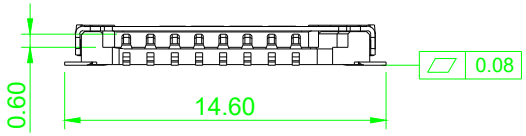

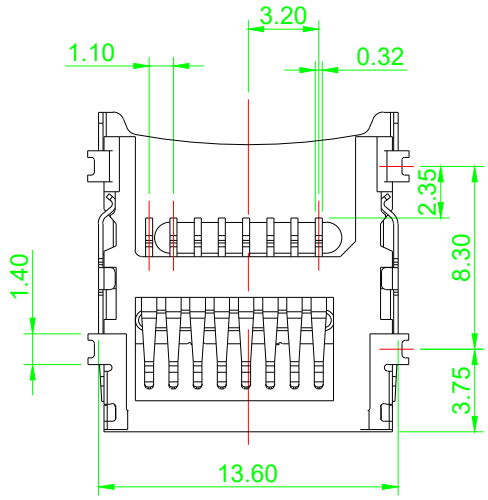

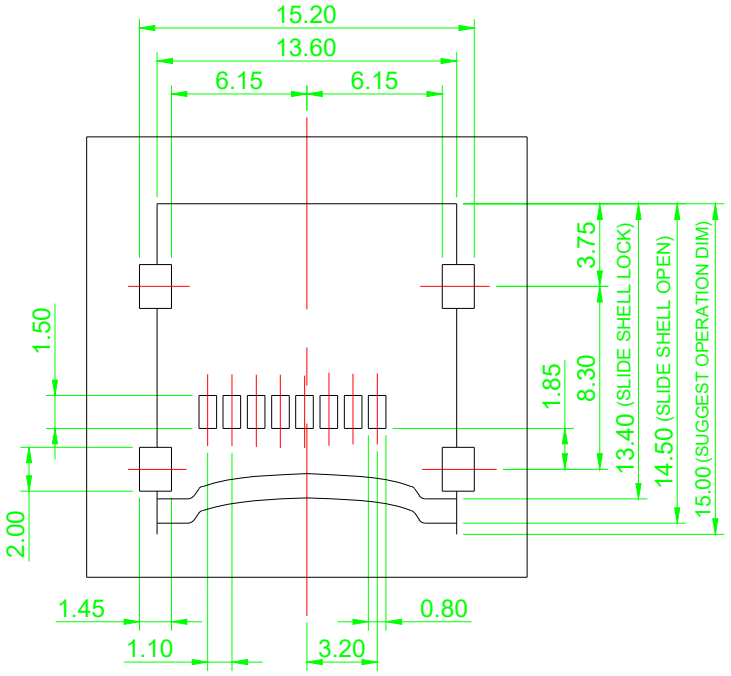

RECOMMENDED PCB LAYOUT (TOLERANCE:±0.05mm)

NOTES:

1.MATERIAL:
- HOUSING: LCP, UL94V-0, BLACK
- CONTACT: PHOSPHOR BRONZE
- SHELL: SUS304


2.FINISH:
- CONTACT:
  - CONTACT AREA: SELECTED GOLD PLATED
  - SOLDER AREA: G/F GOLD PLATED
  - UNDER PLATING: NICKEL PLATED
- SHELL:
  - SOLDER AREA: G/F GOLD PLATED
  - UNDER PLATING: NICKEL PLATED

3.SPECIFICATION:
- CURRENT RATING: 1A / (1PIN)
- VOLTAGE RATING: 30V AC/DC
- DIELECTRIC WITHSTANDING: 100V AC FOR 1 MINUTE
- CONTACT RESISTANCE: 50mΩ MAX.
- INSULATION RESISTANCE: 1000MΩ MIN.
- OPERATING TEMPERATURE: -40°C ~ +85°C
- PULLING FORCE: 2N MIN.
- DURABILITY: 5000 CYCLES MIN.

4.PART NO:

MSD-011400X

PLATING:
0 : GOLD G/F
1 : GOLD 15u"




PIN1: DAT 2
PIN2: CD/DAT 3
PIN3: CMD
PIN4: VDD
PIN5: CLK
PIN6: VSS
PIN7: DAT 0
PIN8: DAT 1

PIN NO.	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1


研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X° ±3° .XX ±0.20 .X° ±1° .XXX ±0.10	APPROVED	David	SHEET: 1 OF 2	REV.: A	NAME	Micro SD Hinge Type H:1.8mm
				CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/01/15		PART NO.	MSD-011400X / DWG NO. MSD-011400X_01


Rev.	Description.	Date	App.
01			

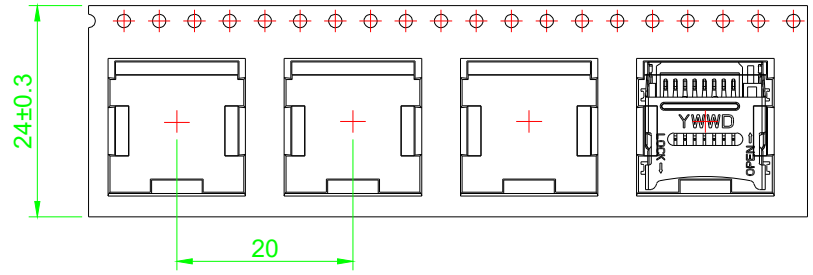



NOTES:

1.PACKING: 1,000 PCS/REEL
10,000 PCS/OUTER CARTON
2.MATERIAL: CARRIER TAPE: PS BLACK
COVER TAPE: PET FILM
REEL: PLASTIC
3.PEEL STRENGTH OF COVER TAPE:
20~80g(PEEL SPEED 300mm/MINUTE)

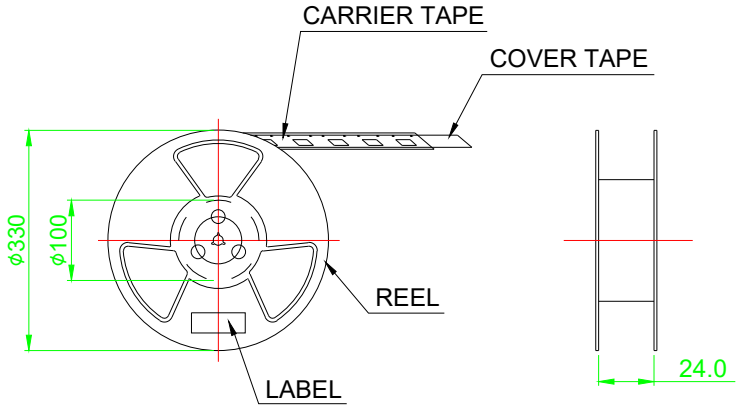

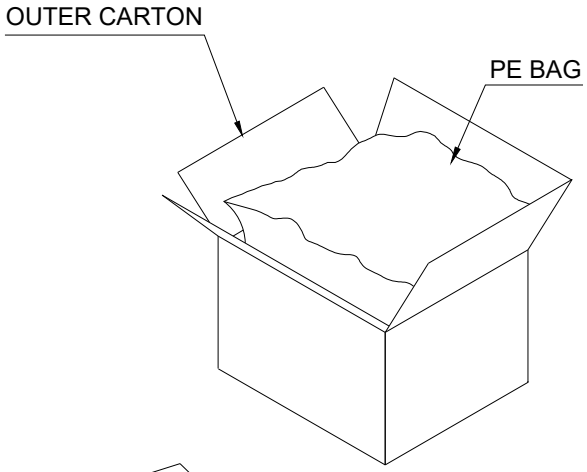

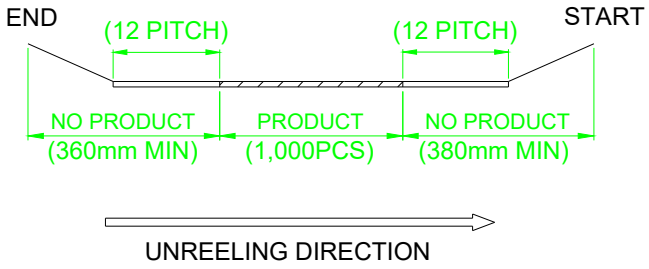

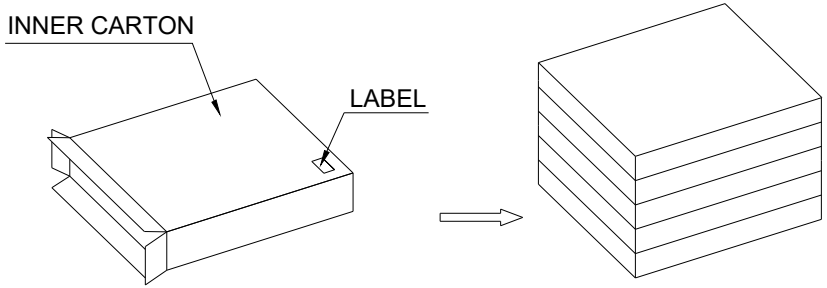

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X° ±3° .XX ±0.20 .X° ±1° .XXX ±0.10	APPROVED	David	SHEET: 2 OF 2	REV.: A	NAME	Micro SD Hinge Type H:1.8mm Packing
				CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/01/15		PART NO.	MSD-011400X / DWG NO. MSD-011400X_01