



Rev.	Description.	Date	App.
01			




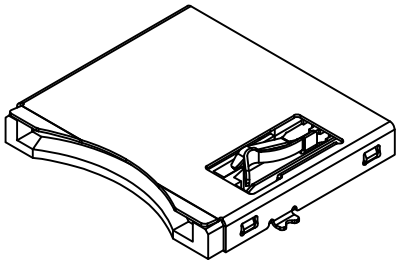


NOTES:
1.MATERIAL:
HOUSING: LCP, UL94V-0, BLACK
CONTACT: COPPER ALLOY
SHELL: COPPER ALLOY
2.FINISH:
CONTACT:
CONTACT AREA: G/F GOLD PLATED
SOLDER AREA: TIN PLATED
UNDER PLATING: NICKEL PLATED
SHELL:
SOLDER AREA: TIN PLATED
UNDER PLATING: NICKEL PLATED
3.SPECIFICATION:
CURRENT RATING: 0.5A / (1PIN)
VOLTAGE RATING: 100V AC/DC
DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE
CONTACT RESISTANCE: 100mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN.
OPERATING TEMPERATURE: -25°C ~ +85°C
DURABILITY: 10000 CYCLES MIN.
INSERTION FORCE: 14N MAX.
WITHDRAWAL FORCE: 1N

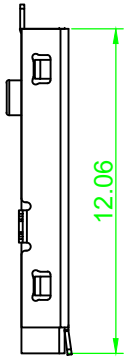

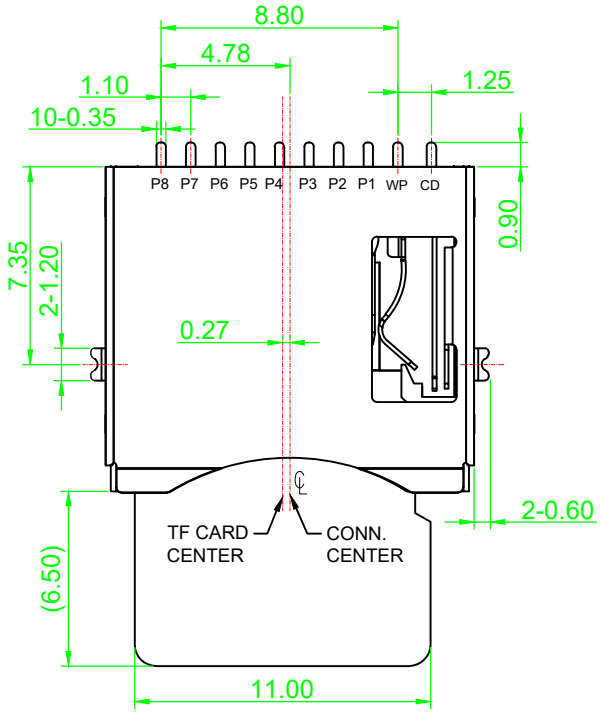


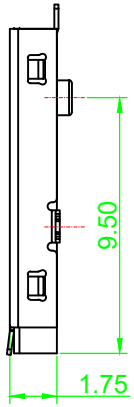

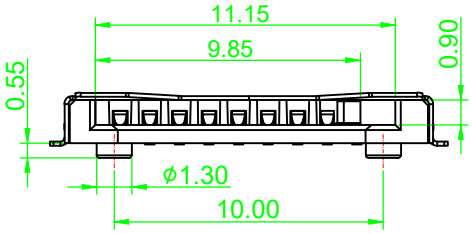

CARD DETECTION SWITCH	
WHEN CARD IS EJECTED	WHEN CARD IS INSERTED
OPEN Cd G	CLOSE Cd G


PIN NO.	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1
WP	CD
CD	GND

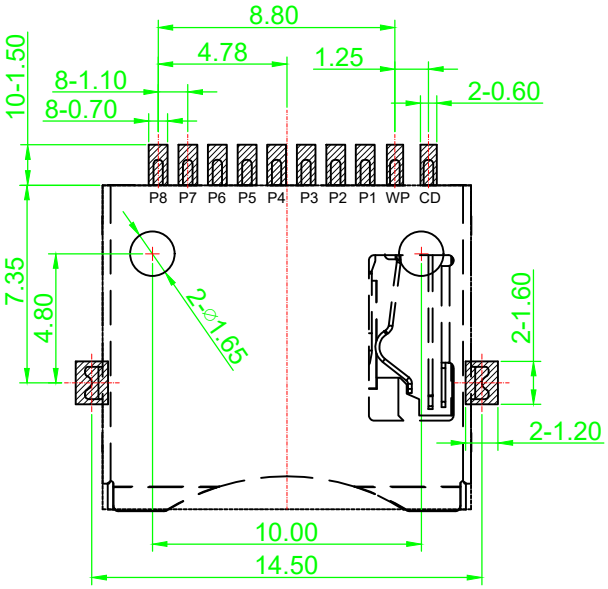

PCB LAYOUT TOP VIEW (TOLERANCE: ±0.05)


研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 1 OF 2	REV.: A	NAME	Micro SD Push-Pull Type w/SW H:1.75mm
				CHECKED	Sunny	DATE: 2021/01/15		PART NO.	MSD-0110000 / DWG NO. MSD-0110000_01
				DRAWN	Juno				


Rev.	Description.	Date	App.
01			

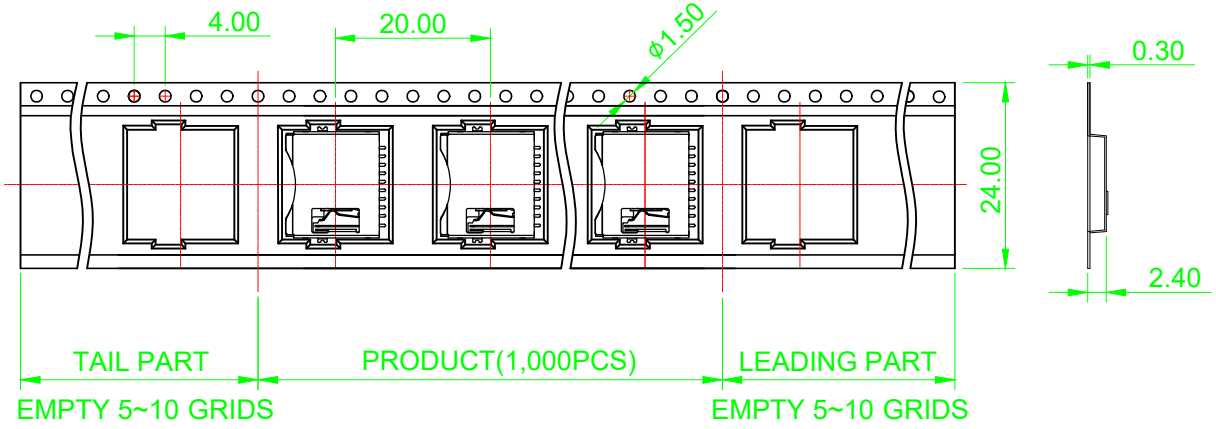

NOTES:

1.PACKING : 1,000 PCS/REEL, 10 REEL/BAG
10,000 PCS/OUTER CARTON
2.MATERIAL: CARRIER TAPE: PS BLACK
COVER TAPE: PET FILM
REEL: PLASTIC
3.PEEL STRENGTH OF COVER TAPE:
20~80g(PEEL SPEED 300mm/MINUTE)

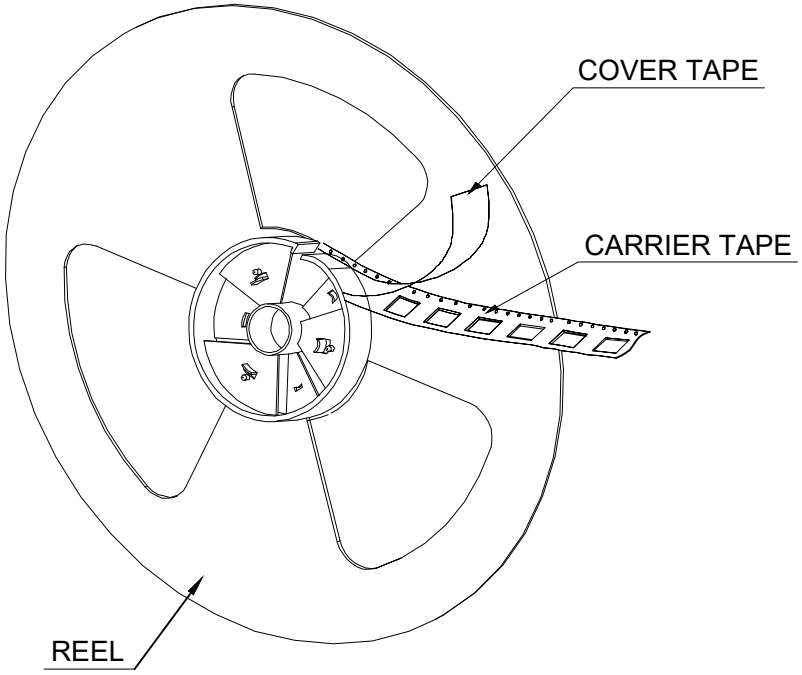

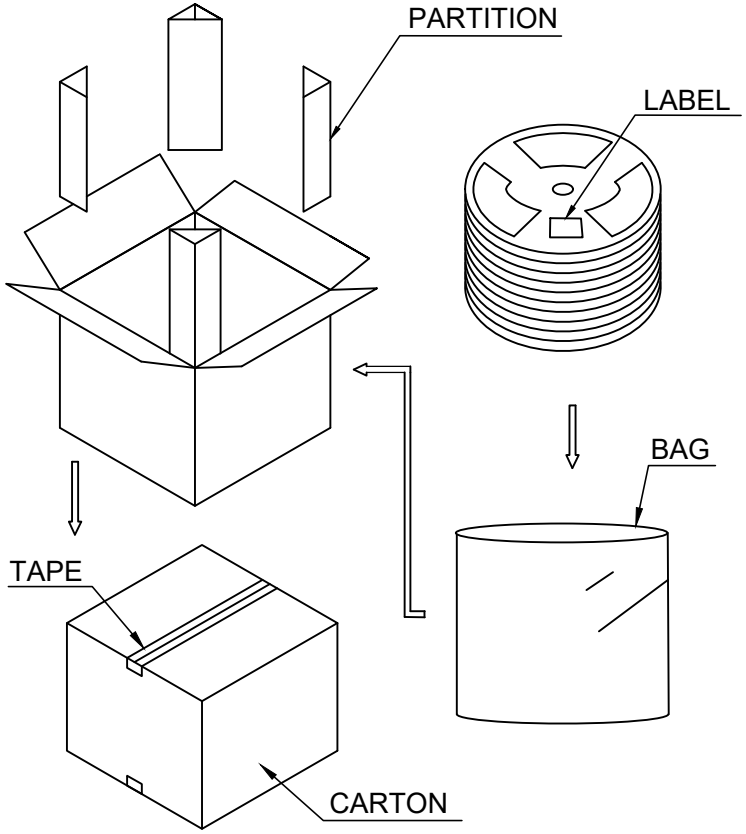

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 2 OF 2	REV.: A	NAME	Micro SD Push-Pull Type w/SW H:1.75mm Packing
				CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/01/15		PART NO.	MSD-0110000 DWG NO. MSD-0110000_01