


Rev.	Description.	Date	App.
01			

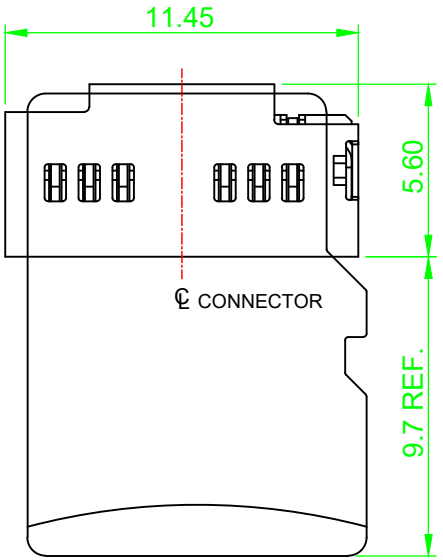


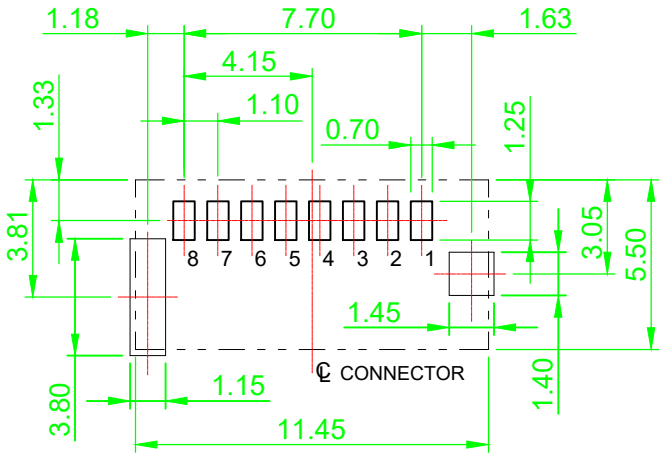



RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05


NOTES:
1.MATERIAL:
HOUSING: LCP, UL94V-0, BLACK
CONTACT: PHOSPHOR BRONZE
SHELL: SUS304
2.FINISH:
CONTACT:
CONTACT AREA: G/F GOLD PLATED
SOLDER AREA: G/F GOLD PLATED
UNDER PLATING: NICKEL PLATED
SHELL:
SOLDER AREA: G/F GOLD PLATED
UNDER PLATING: NICKEL PLATED
3.SPECIFICATION:
CURRENT RATING: 0.5A / (1PIN)
VOLTAGE RATING: 10V AC/DC
DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE
CONTACT RESISTANCE: 100mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN.
OPERATING TEMPERATURE: -25°C ~ +65°C
DURABILITY: 10000 CYCLES MIN.
CONTACT RETENTION: 2.5N MIN.
INSERTION FORCE: 9.8N MAX.
WITHDRAWAL FORCE: 2N

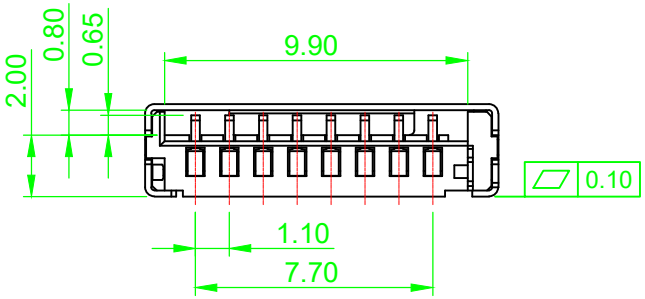



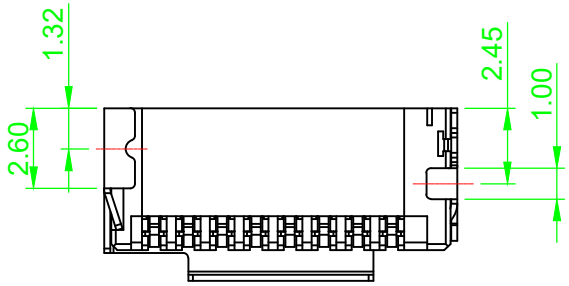






T-FLASH CARD
SCALE 1:2

PIN NO.	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1

研騰國際企業股份有限公司
YANNIS ELECTRONICS CO.,LTD


PROJECTION:	UNIT: mm	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 1 OF 2	REV.: A	NAME	Micro SD Push-Pull Mini Type H:3.0mm
	SCALE: Free		CHECKED	Sunny				
			DRAWN	Juno	DATE: 2021/02/26		PART NO.	MSD-0112000 / DWG NO. MSD-0112000_01


Rev.	Description.	Date	App.
01			

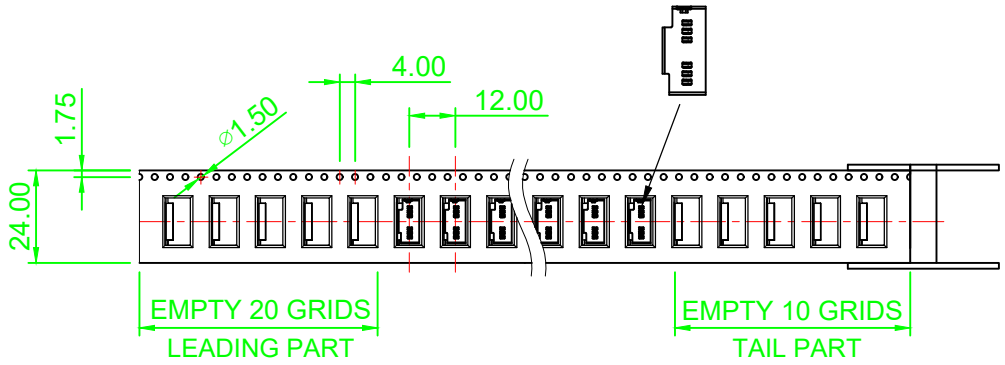

NOTES:

1.PACKING: 1,500 PCS/REEL
15,000 PCS/OUTER CARTON
2.MATERIAL: CARRIER TAPE: PS BLACK
COVER TAPE: PET FILM
REEL: PLASTIC
3.PEEL STRENGTH OF COVER TAPE:
20~80g(PEEL SPEED 300mm/MINUTE)
4.G/W: 10.85 Kg , N/W: 3.75 Kg

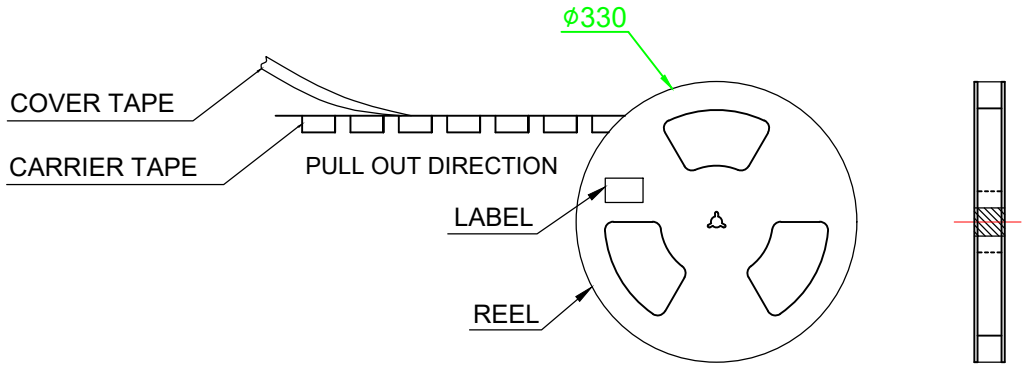

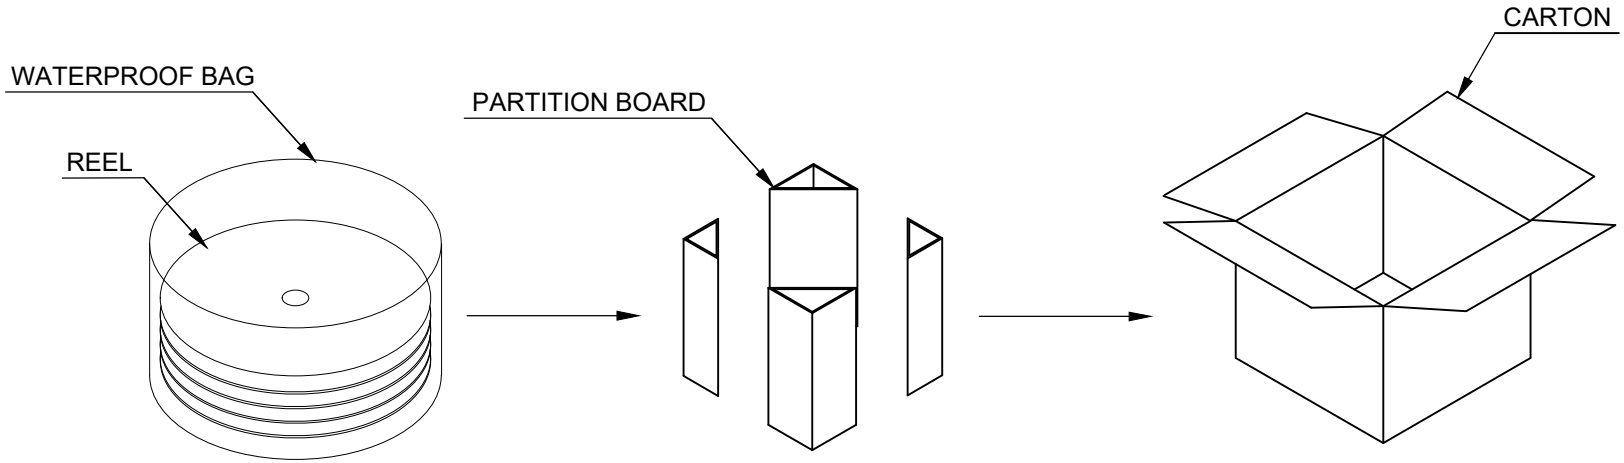

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 2 OF 2	REV.: A	NAME	Micro SD Push-Pull Mini Type H:3.0mm Packing
				CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/02/26		PART NO.	MSD-0112000 / DWG NO. MSD-0112000_01