


Rev.	Description.	Date	App.
01			

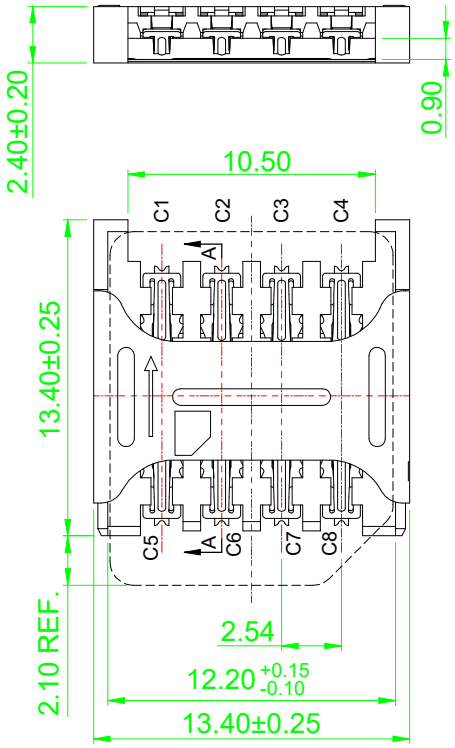

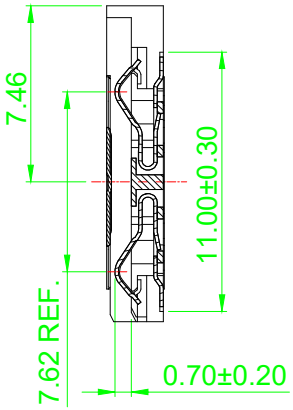


SECTION A-A

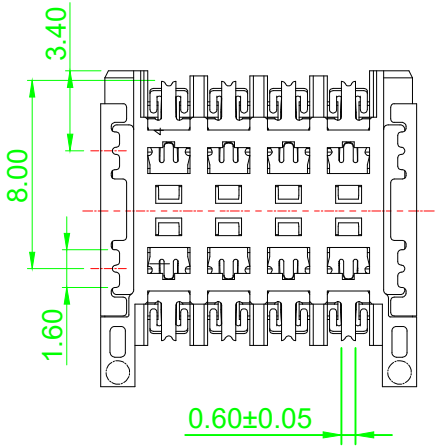


NOTES:
1.MATERIAL:
HOUSING: LCP, UL94V-0, BLACK
CONTACT: COPPER ALLOY
SHELL: STAINLESS STEEL


2.FINISH:
CONTACT:
CONTACT AREA: G/F GOLD PLATED
SOLDER AREA: G/F GOLD PLATED
UNDER PLATING: NICKEL PLATED
SHELL:
SOLDER AREA: G/F GOLD PLATED
UNDER PLATING: NICKEL PLATED

3.SPECIFICATION:
CURRENT RATING: 1A / (1PIN)
VOLTAGE RATING: 50V AC/DC
DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE
CONTACT RESISTANCE: 30mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN.
OPERATING TEMPERATURE: -40°C ~ +85°C
DURABILITY: 10,000 CYCLES MIN.
CONTACT RETENTION: 2.5N MIN.
INSERTION FORCE: 10N MAX.
WITHDRAWAL FORCE: 10N

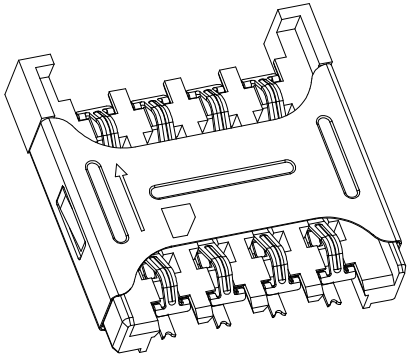

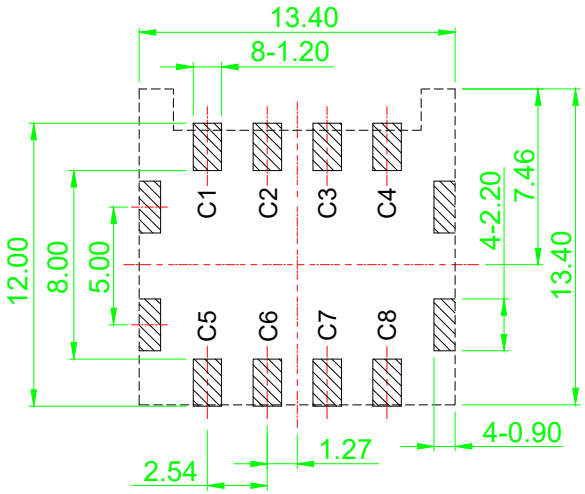

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE: ±0.05)

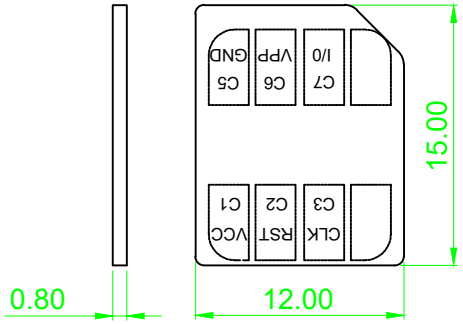


MICRO SIM CARD

SIM PIN ASSIGNMENT	
PIN NO.	NAME
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED

研膳國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ±3° .XX ±0.20 .X° ±1° .XXX ±0.10	APPROVED	David	SHEET: 1 OF 2	REV.: A	NAME	Micro SIM Push-Pull Type 8 Pin H:2.4mm
				CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/03/19		PART NO.	MSIM-0106080 DWG NO. MSIM-0106080_01

Rev.	Description.	Date	App.
01			

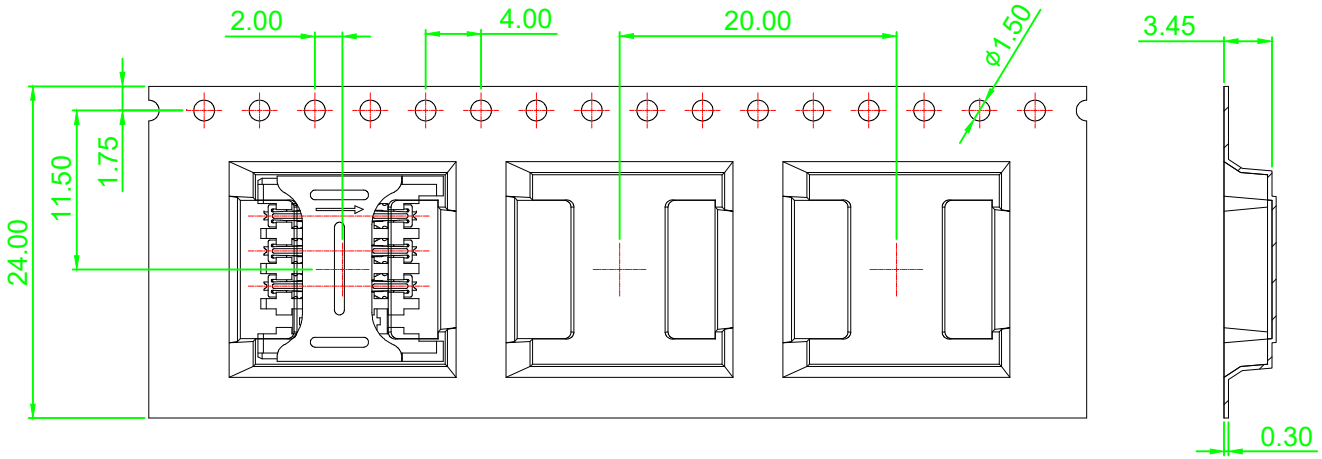

PULL OUT DIRECTION


NOTES:


1.PACKING: 900 PCS/REEL
9,000 PCS/OUTER CARTON


2.MATERIAL: CARRIER TAPE: PS BLACK
COVER TAPE: PET FILM
REEL:PLASTIC


3.PEEL STRENGTH OF COVER TAPE:
20~80g(PEEL SPEED 300mm/MINUTE)

4.G/W: 8.86 Kg , N/W: 3.6 Kg

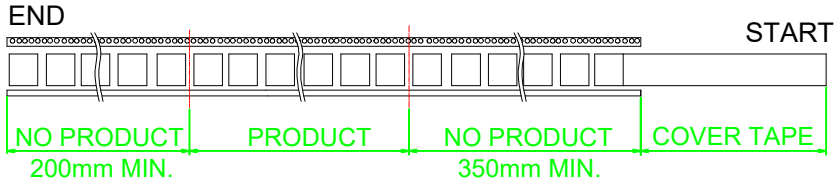

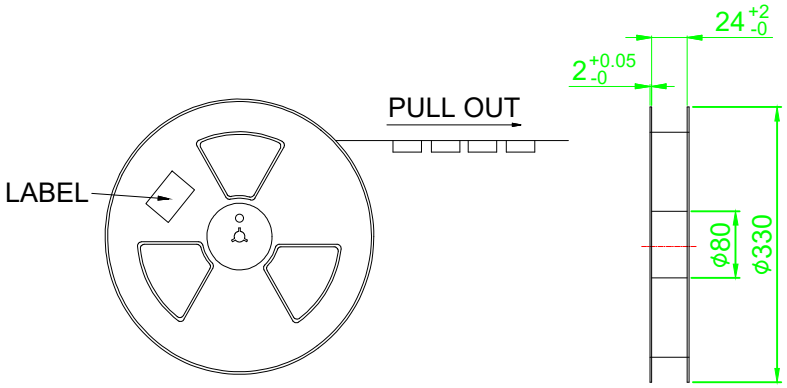

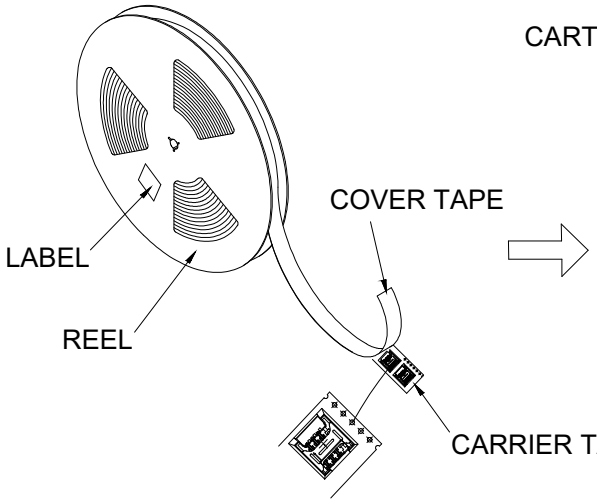

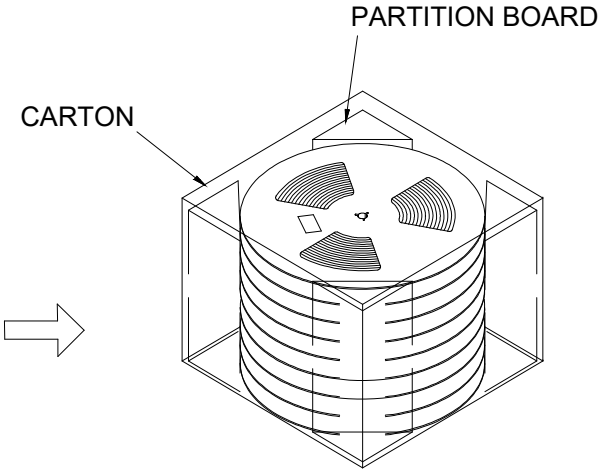

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ±3° .XX ±0.20 .X° ±1° .XXX ±0.10	APPROVED	David	SHEET: 2 OF 2	REV.: A	NAME	Micro SIM Push-Pull Type H:2.4mm Packing	
				CHECKED	Sunny					
				DRAWN	Juno	DATE: 2021/03/19		PART NO.	MSIM-01060X0	DWG NO. MSIM-01060X0_01