


Rev.	Description.	Date	App.
01			

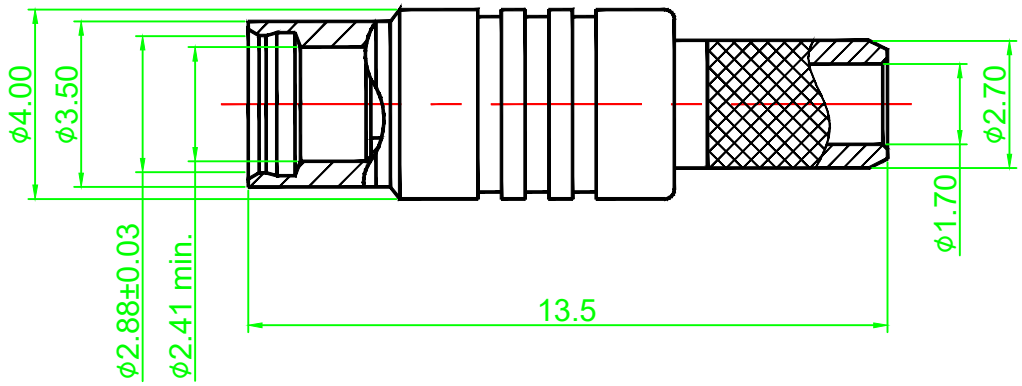

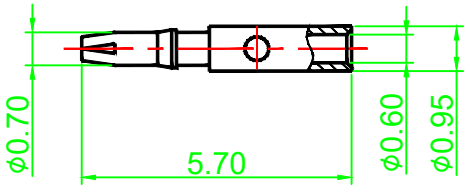

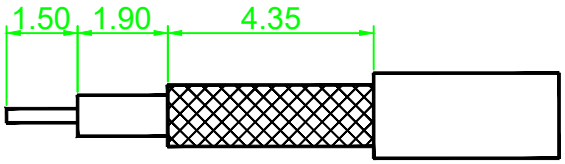

Recommended Cable Stripping

NOTES: TYPICAL SPECIFICATIONS

1.0. ELECTRICAL DATA
- 1.1. FREQUENCY RANGE : DC 6 GHz
- 1.2. IMPEDANC : 50 Ohms
- 1.3. VSWR : <1.35
- 1.4. DIELECTRIC WITHSTANDING VOLTAGE : 500 Vrms
- 1.5. INSULATION RESISTANCE : 1000 Mega-Ohms
- 1.6. CENTER CONTACT RESISTANCE : 10.0 mini-Ohms
- 1.7. OUTER CONTACT RESISTANCE : 6.0 mini-Ohms

2.0. MECHANICAL DATA
- 2.1. COUPLING METHOD : Snap-on
- 2.2. DURABILITY (MATING/ UNMATING) : 500 Cycles
- 2.3. ENGAGEMENT FORCE : 6.5 lbs max.
- 2.4. DISENGAGEMENT FORCE : 1.4 to 6.5 lbs

Item/N	Material	Finish
Female Insulator	Teflon	
Female Conductor	Brass	Gold
Jack Body	Brass	Gold

研騰國際企業股份有限公司
YANNIS ELECTRONICS CO.,LTD.

PROJECTION:	UNIT: mm	GENERAL TOLERANCES: X. ±0.25 X°. ±3° .X ±0.15 .X° ±2° .XX ±0.08	APPROVED	David	SHEET: 1 OF 1	REV.: A	NAME: MMCX JACK STR. FOR RG-178 L : 13.5mm
	SCALE: Free		CHECKED	Sunny			
			DRAWN	Juno	DATE: 2021/01/27		PART NO.: MMCX-M0200JC-01 DWG NO.: MMCX-M0200JC-01_01