



Rev.	Description.	Date	App.
01			

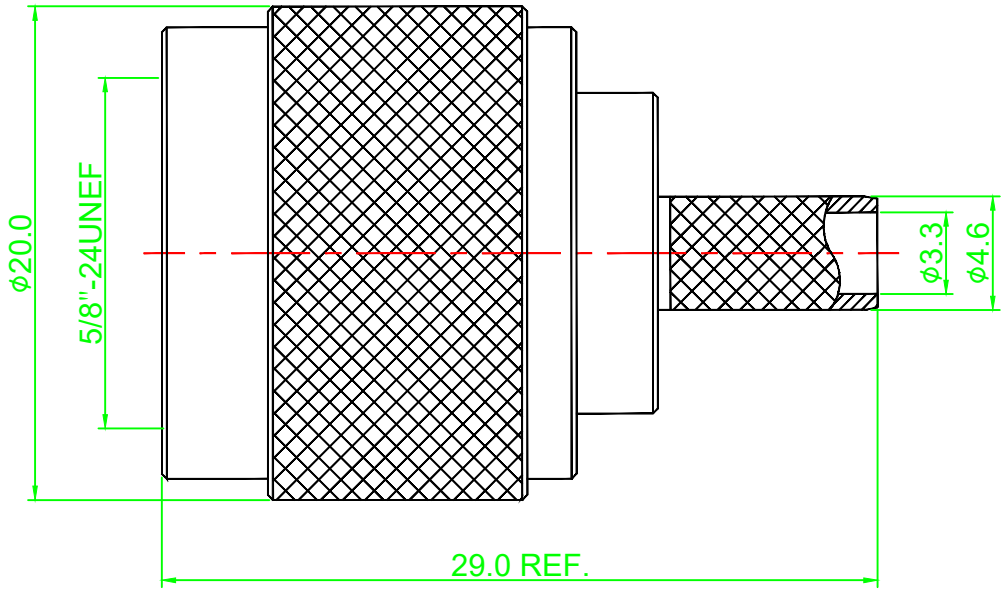

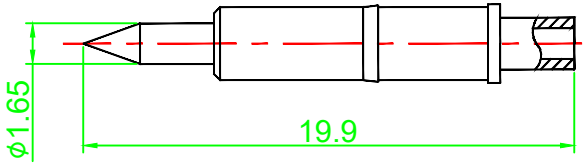

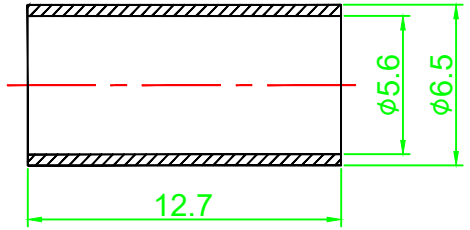

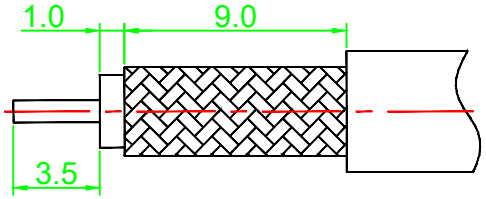

Recommended Cable Stripping

NOTES: TYPICAL SPECIFICATIONS

1.0. ELECTRICAL DATA
- 1.1. FREQUENCY RANGE : DC 6 GHz
- 1.2. IMPEDANC : 50 Ohms
- 1.3. VSWR : <1.5
- 1.4. DIELECTRIC WITHSTANDING VOLTAGE : 1000 Vrms
- 1.5 WORKING VOLTAGE : 500 Vrms max.
- 1.6. INSULATION RESISTANCE : 5000 Mega-Ohms
- 1.7. CENTER CONTACT RESISTANCE : 2.5 mini-Ohms
- 1.8. OUTER CONTACT RESISTANCE : 1.5 mini-Ohms

2.0. MECHANICAL DATA
- 2.1. COUPLING METHOD : THREADED
- 2.2. DURABILITY (MATING/ UNMATING) : 500 Cycles
- 2.3. COUPLING NUT RETENTION : 60 lbs
- 2.4. MATING TORQUE : 6-10 in-lbs max.

Item/N	Material	Finish
Body	Brass	Nickel
Center Contact	Brass	Gold
Insulator	Delrin	white
Shell	Brass	Nickel
Gasket	Rubber	Red
Crimp Sleeve	Brass	Nickel
Washer	Steel	Nickel

研騰國際企業股份有限公司
YANNIS ELECTRONICS CO.,LTD.

PROJECTION:	UNIT: mm	GENERAL TOLERANCES: X. ±0.38 X°. ±3° .X ±0.25 .X° ±2° .XX ±0.15	APPROVED	David	SHEET: 1 OF 1	REV.: A	NAME: N PLUG STR CRIMP FOR RG-58
	SCALE: Free		CHECKED	Sunny			
			DRAWN	Juno	DATE: 2021/01/28	PART NO.	N-N0100PC-01
						DWG NO.	N-N0100PC-01_01