

Rev.	Description.	Date	App.
01			

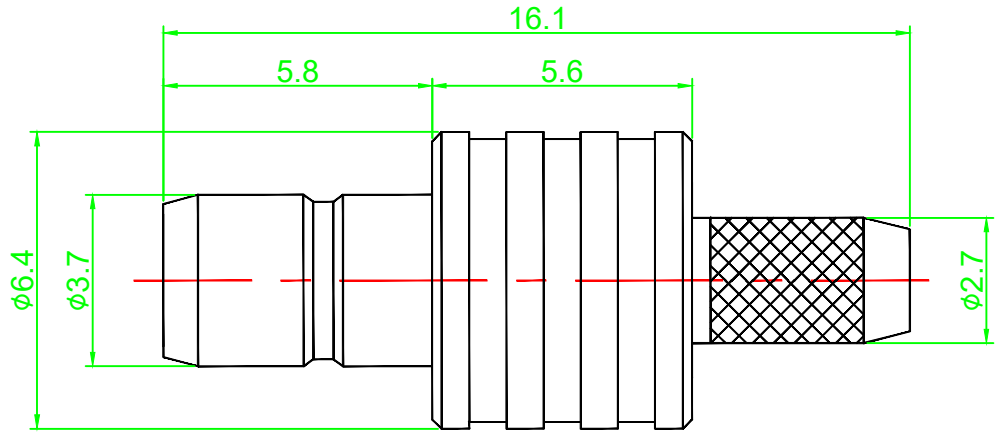

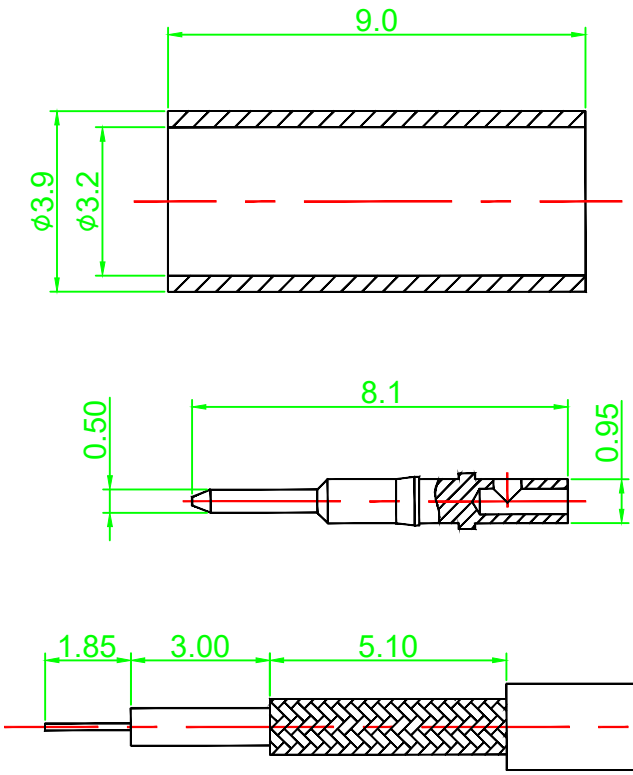

Recommended Cable Stripping

NOTES: TYPICAL SPECIFICATIONS

1.0. ELECTRICAL DATA
- 1.1. FREQUENCY RANGE : DC 4 GHz
- 1.2. IMPEDANC : 50 Ohms
- 1.3. VSWR : < 1.42
- 1.4. DIELECTRIC WITHSTANDING VOLTAGE : 750 Vrms
- 1.5. WORKING VOLTAGE : 250 Vrms max.
- 1.6. INSULATION RESISTANCE : 1000 Mega-Ohms
- 1.7. CENTER CONTACT RESISTANCE : 6.0 mini-Ohms
- 1.8. OUTER CONTACT RESISTANCE : 4.0 mini-Ohms

2.0. MECHANICAL DATA
- 2.1. COUPLING METHOD : Snap-on
- 2.2. DURABILITY (MATING/ UNMATING) : 500 Cycles
- 2.3. ENGAGEMENT FORCE : 14 lbs max.
- 2.4. DISENGAGEMENT FORCE : 14 lbs max.
- 2.5. CONTACT RETENTION : 4 lbs

Item/N	Material	Finish
Sleeve	Brass	Gold
Insulator	Teflon	
Center Conductor	Brass	Gold
Body	Brass	Gold

研騰國際企業股份有限公司
YANNIS ELECTRONICS CO.,LTD.

PROJECTION:	UNIT: mm	GENERAL TOLERANCES: X. ±0.38 X°. ±3° .X ±0.25 .X° ±2° .XX ±0.15	APPROVED	David	SHEET: 1 OF 1	REV.: A	NAME	SMB JACK STR. FOR RG-174	
	SCALE: Free		CHECKED	Sunny					
			DRAWN	Juno	DATE: 2021/02/01		PART NO.	SMB-B1204JC-01	DWG NO. SMB-B1204JC-01_01