



Rev.	Description.	Date	App.
01			

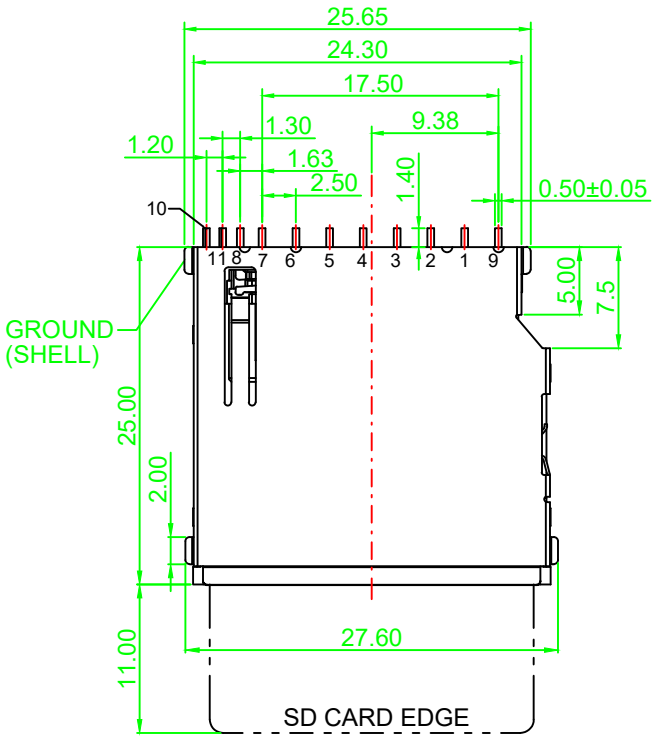


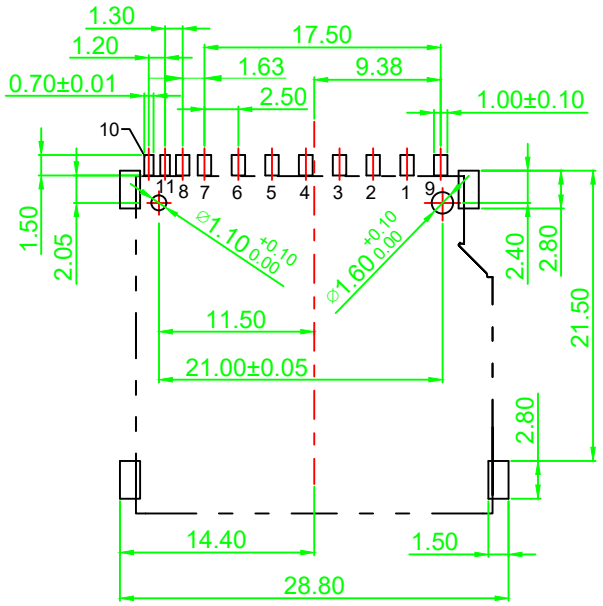


P.C.B LAYOUT

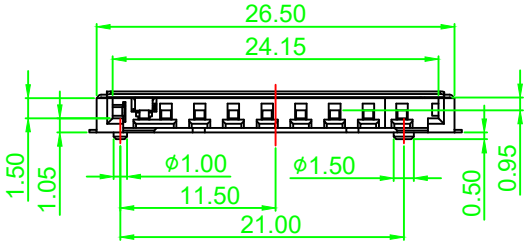



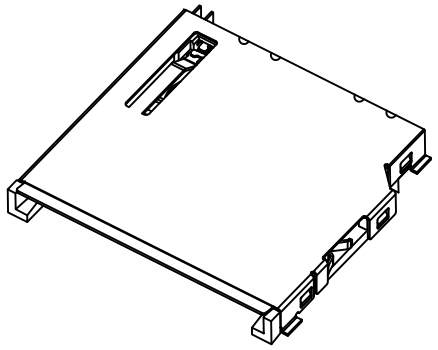

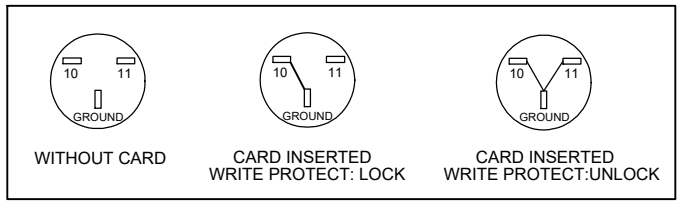

NOTES:
1.MATERIAL:
HOUSING: LCP, UL94V-0, BLACK
CONTACT: COPPER ALLOY
SHELL: COPPER ALLOY

2.FINISH:
CONTACT:
CONTACT AREA: G/F GOLD PLATED
SOLDER AREA: 100u" TIN PLATED
UNDER PLATING: NICKEL PLATED


3.SPECIFICATION:
CURRENT RATING: 0.5A / (1PIN)
VOLTAGE RATING: 250V AC/DC
DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE
CONTACT RESISTANCE: 100mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
OPERATING TEMPERATURE: -25°C ~ +90°C
INSERTION FORCE: 40N MAX.
WITHDRAWAL FORCE: 2N

PIN ASSIGNMENT	
PIN NO.	NAME
1	CD/DAT3
2	CMD
3	VSS1
4	VDD
5	CLK
6	VSS2
7	DAT0
8	DAT1
9	DAT2
10	WP
11	CD

GROUND(SHELL)-COMMON PIN

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 1 OF 3	REV.: A	NAME	SD Push-Pull Type w/SW H:2.9mm
				CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/03/05		PART NO.	SD-0112000 / DWG NO. SD-0112000_01


Rev.	Description.	Date	App.
01			

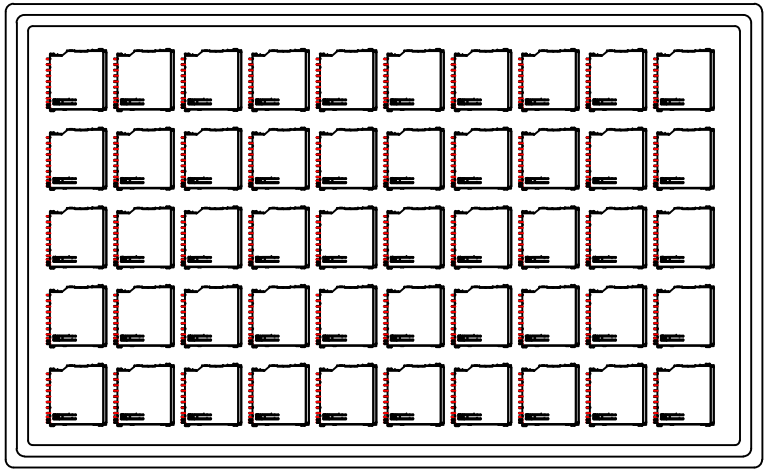

NOTES:


1.PACKING : 50 PCS/TRAY
2,000 PCS/OUTER CARTON

2.G/W: 6.5 Kg , N/W: 4.7 Kg

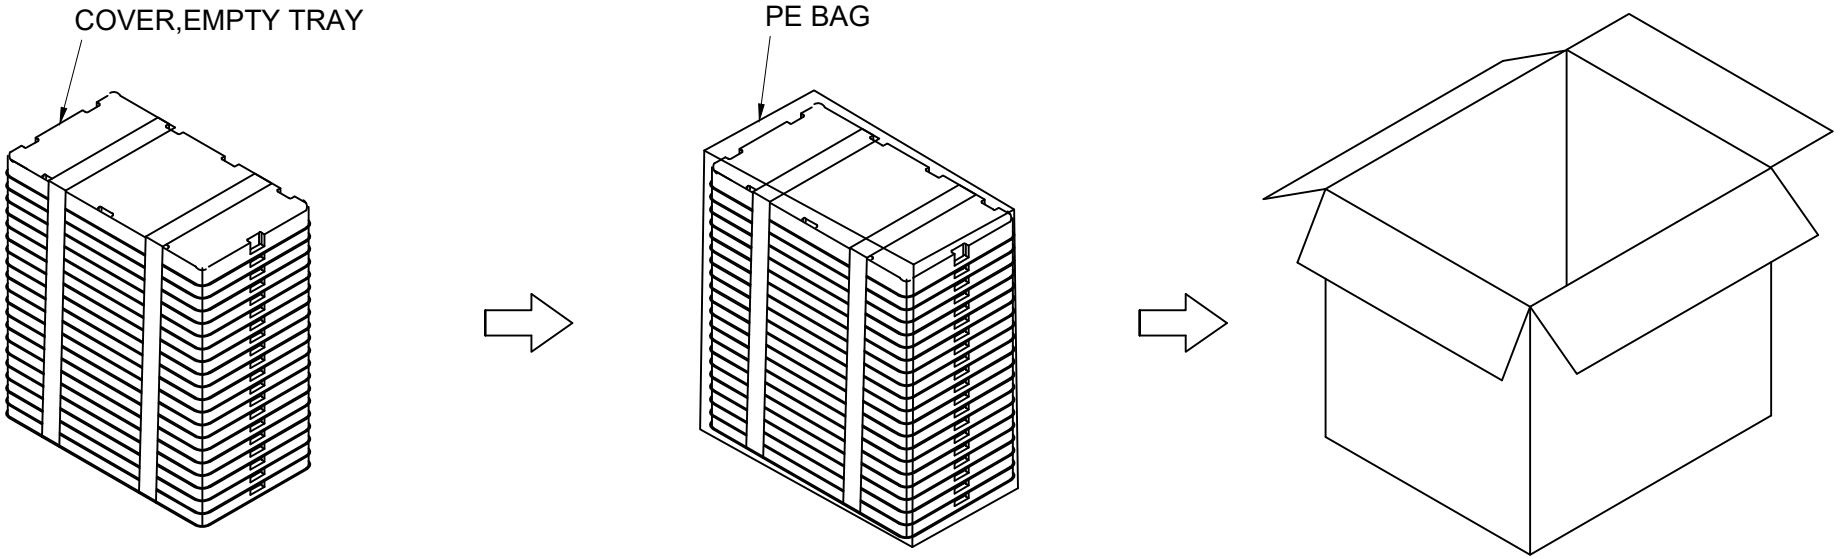


研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 2 OF 3	REV.: A	NAME	SD Push-Pull Type w/SW H:2.9mm Package(Tray)
				CHECKED	Sunny	DATE: 2021/03/05		PART NO.	SD-0112000 DWG NO. SD-0112000_01
				DRAWN	Juno				


Rev.	Description.	Date	App.
01			

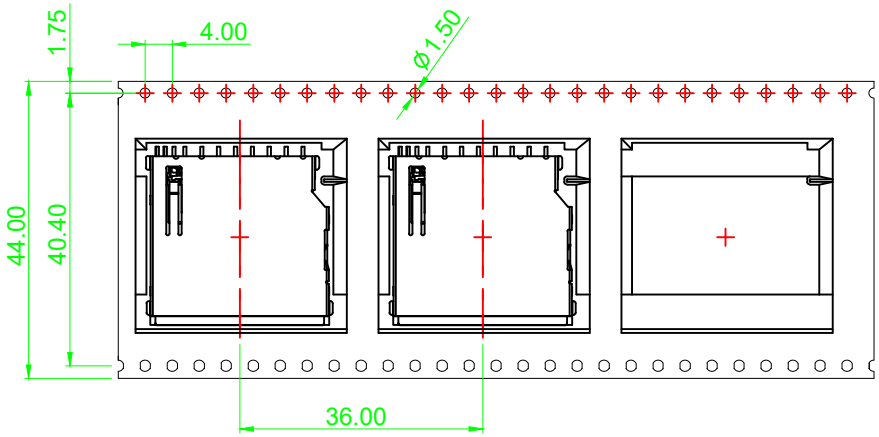


NOTES:


1.PACKING: 350 PCS/REEL
2,100 PCS/OUTER CARTON
2.MATERIAL: CARRIER TAPE: PS BLACK
COVER TAPE: PET FILM
REEL: PLASTIC
3.PEEL STRENGTH OF COVER TAPE: 20~120g(PEEL SPEED 300mm/MINUTE)
4.G/W: 8.5 Kg , N/W: 4.6 Kg

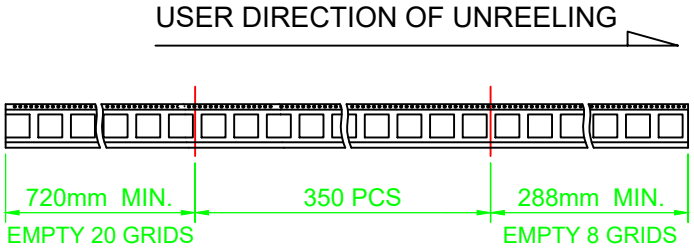


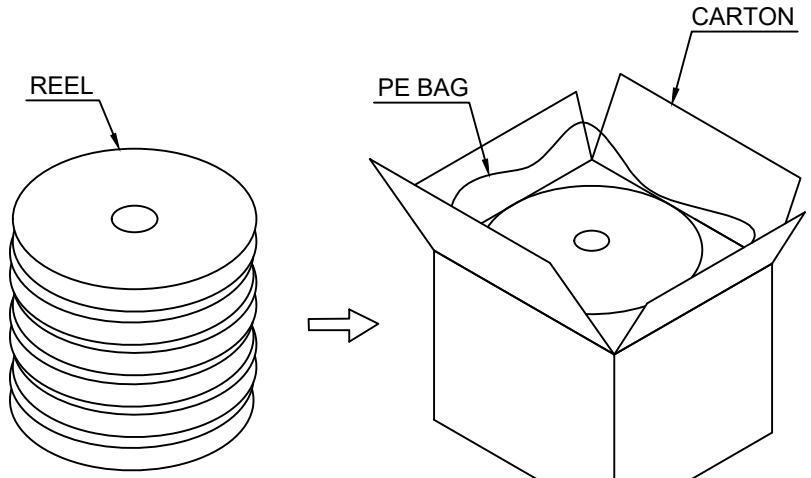

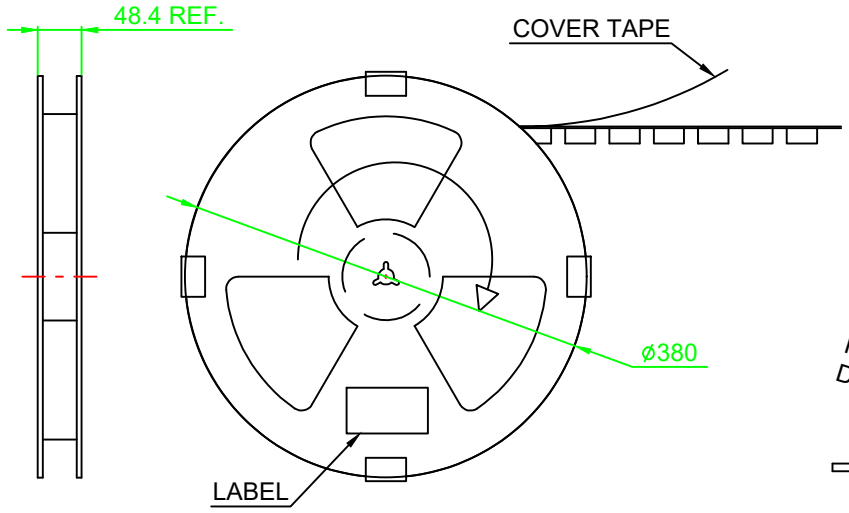

COVER TAPE PEELING
FORCE:20gf~120gf



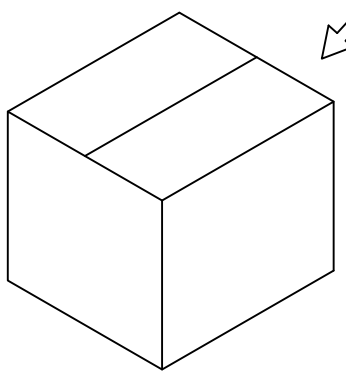

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 3 OF 3	REV.: A	NAME	SD Push-Pull Type w/SW H:2.9mm Packing(Reel)
				CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/03/05		PART NO.	SD-0112000 DWG NO. SD-0112000_01