



Rev.	Description.	Date	App.
01			

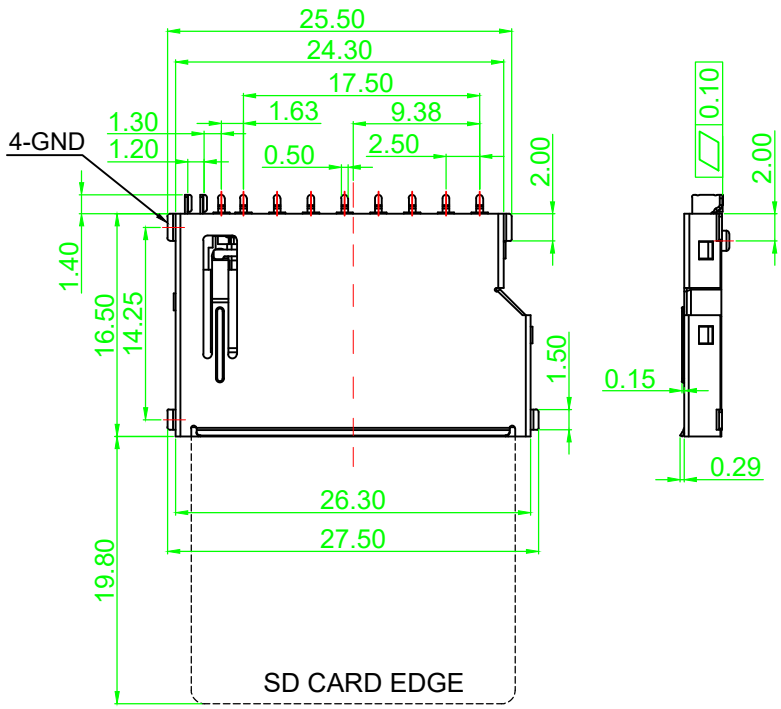


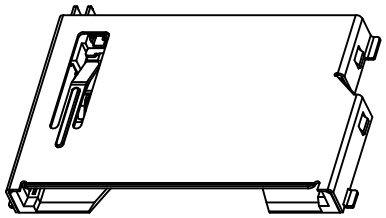

NOTES:
1.MATERIAL:
HOUSING: LCP, UL94V-0,
CONTACT: COPPER ALLOY
SHELL: COPPER ALLOY
2.FINISH:
CONTACT:
CONTACT AREA: G/F GOLD PLATED
SOLDER AREA: 50~100u" TIN PLATED
UNDER PLATING: NICKEL PLATED
3.SPECIFICATION:
CURRENT RATING: 0.5A / (1PIN)
VOLTAGE RATING: 250V AC/DC
DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE
CONTACT RESISTANCE: 100mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN.
OPERATING TEMPERATURE: -25°C ~ +85°C
INSERTION FORCE: 40N MAX.
WITHDRAWAL FORCE: 2N

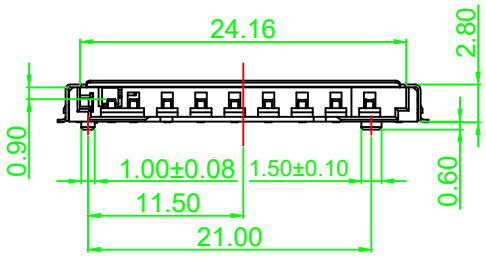

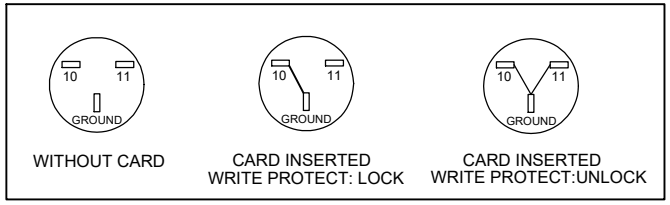

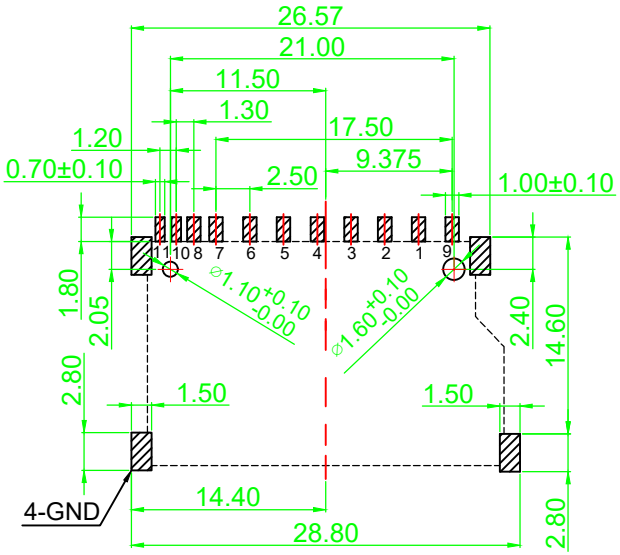

RECOMMENDED P.C.B LAYOUT (TOLERANCE: ±0.05)


PIN ASSIGNMENT	
PIN NO.	NAME
1	CD/DAT3
2	CMD
3	VSS1
4	VDD
5	CLK
6	VSS2
7	DAT0
8	DAT1
9	DAT2
10	CD
11	WP


GROUND(SHELL)-COMMON PIN

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 1 OF 2	REV.: A	NAME	SD Push-Pull Short Type w/SW H:2.8mm
				CHECKED	Sunny	DATE: 2021/03/05		PART NO.	SD-0113000 / DWG NO. SD-0113000_01
				DRAWN	Juno				

Rev.	Description.	Date	App.
01			

USER DIRECTION OF UNREELING

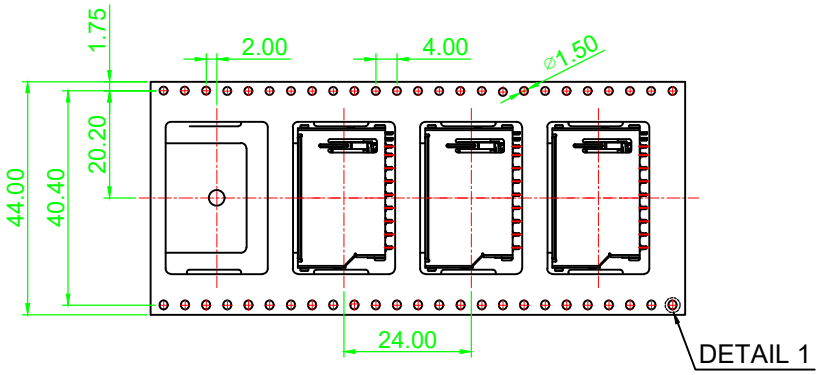





DETAIL 1

NOTES:

1.PACKING: 600 PCS/REEL
3,600 PCS/OUTER CARTON
2.MATERIAL: CARRIER TAPE: PS BLACK
COVER TAPE: PET FILM
REEL: PLASTIC
3.PEEL STRENGTH OF COVER TAPE:
20~80g(PEEL SPEED 300mm/MINUTE)

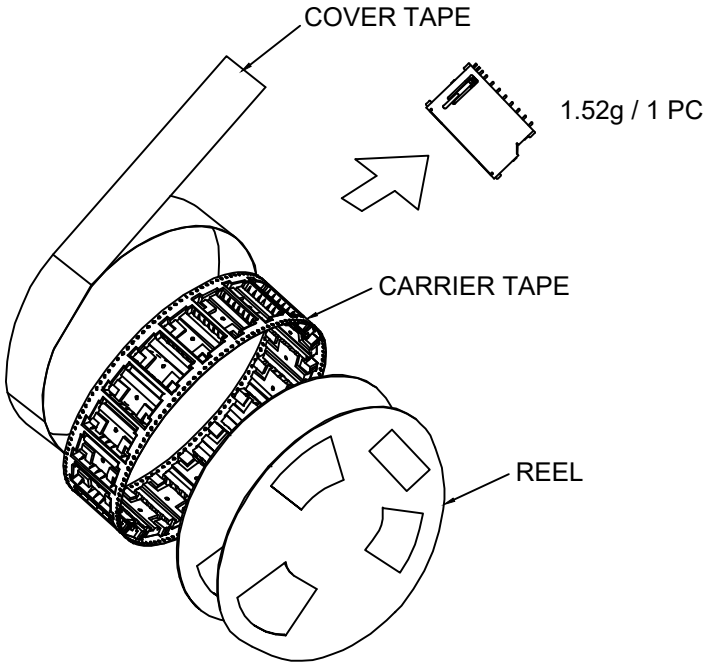

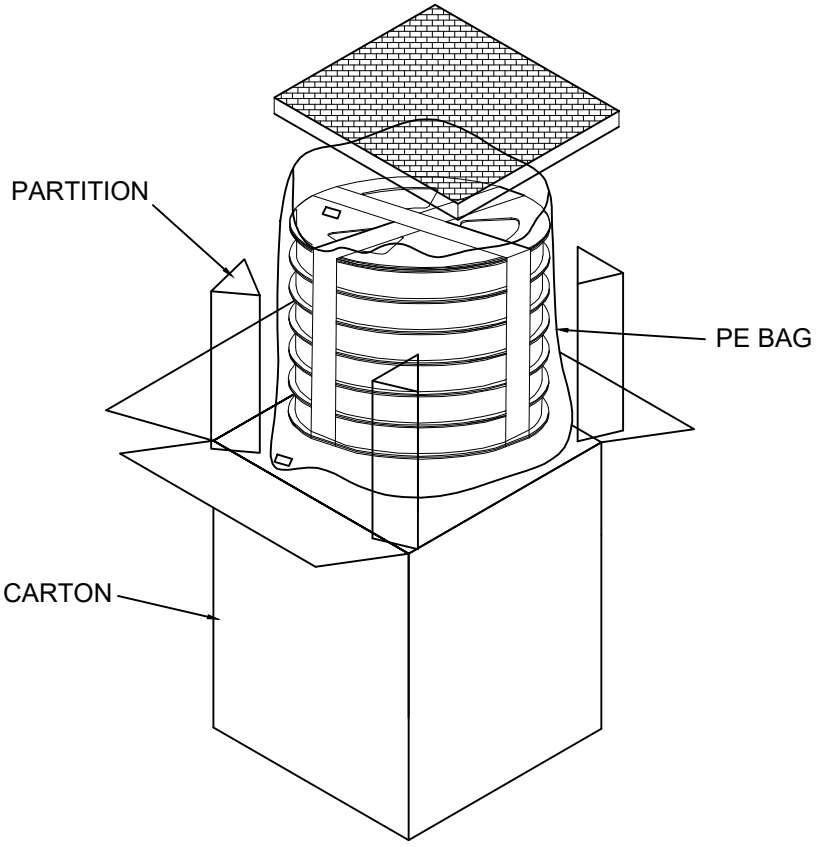

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 2 OF 2	REV.: A	NAME	SD Push-Pull Short Type w/SW H:2.8mm Packing
				CHECKED	Sunny	DATE: 2021/03/05		PART NO.	SD-0113000 DWG NO. SD-0113000_01
				DRAWN	Juno				