



Rev.	Description.	Date	App.
01			

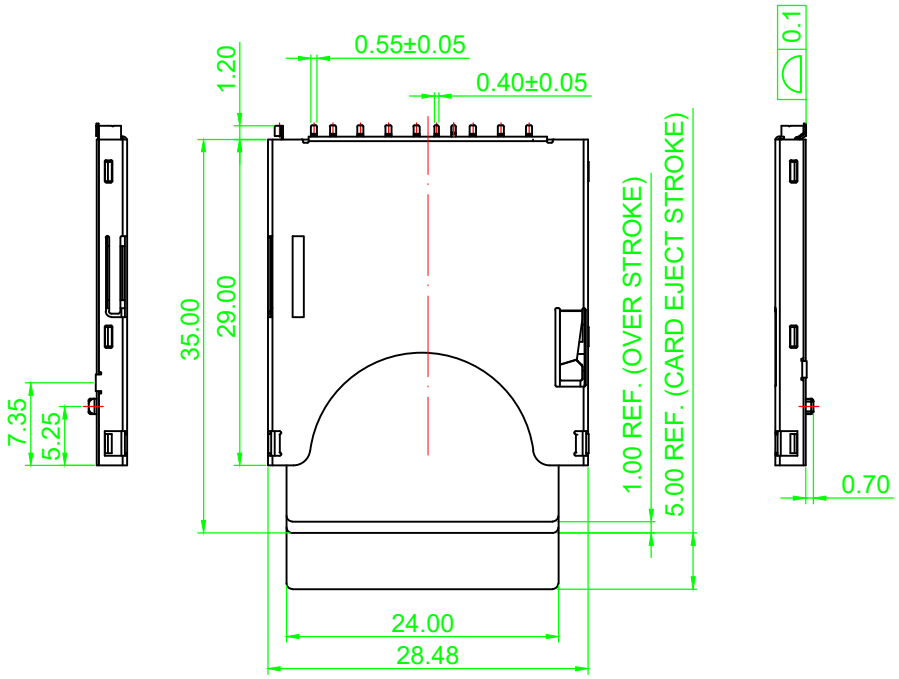

NOTES:
1.MATERIAL:
HOUSING: LCP, UL94V-0, BLACK
SLIDE: LCP, UL94V-0, BLACK
CONTACT: PHOSPHOR BRONZE
SHELL: SUS304
SPRING: SWP
2.FINISH:
CONTACT:
CONTACT AREA: G/F GOLD PLATED
SOLDER AREA: 80u" TIN PLATED
UNDER PLATING: NICKEL PLATED
3.SPECIFICATION:
CURRENT RATING: 0.5A / (1PIN)
VOLTAGE RATING: 100V AC/DC
DIELECTRIC WITHSTANDING: 1000V AC FOR 1 MINUTE
CONTACT RESISTANCE: 80mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN.
OPERATING TEMPERATURE: -20°C ~ +85°C
DURABILITY: 10000 CYCLES MIN.
CONTACT RETENTION: 2.5N MIN.
INSERTION FORCE: 9.8N MAX.
WITHDRAWAL FORCE: 4N

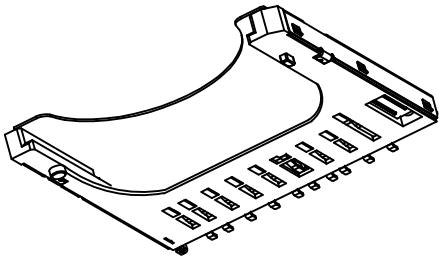

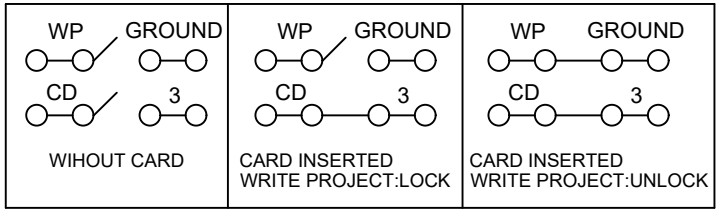

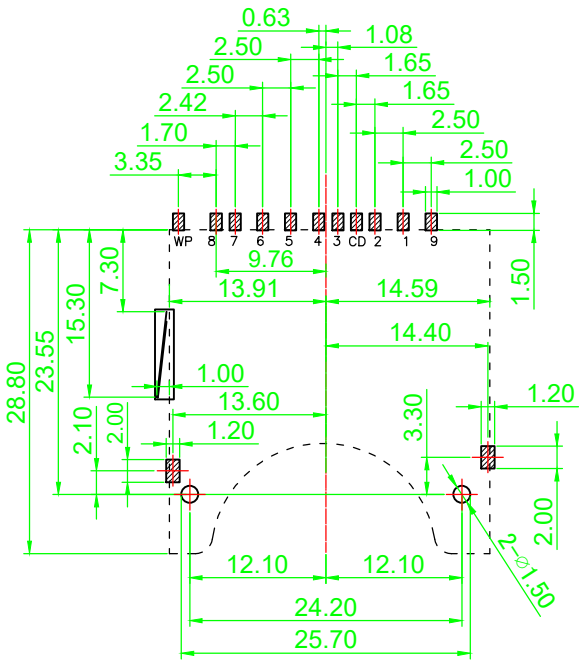


P.C.B LAYOUT (TOLERANCE: ±0.05)

PIN ASSIGNMENT	
PIN NO.	NAME
1	CD/DAT3
2	CMD
3	VSS1
4	VDD
5	CLK
6	VSS2
7	DAT0
8	DAT1
9	DAT2


研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 1 OF 2	REV.: A	NAME	SD Push-Push Type w/SW H:2.8mm
				CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/03/03		PART NO.	SD-0110000 DWG NO. SD-0110000_01


Rev.	Description.	Date	App.
01			

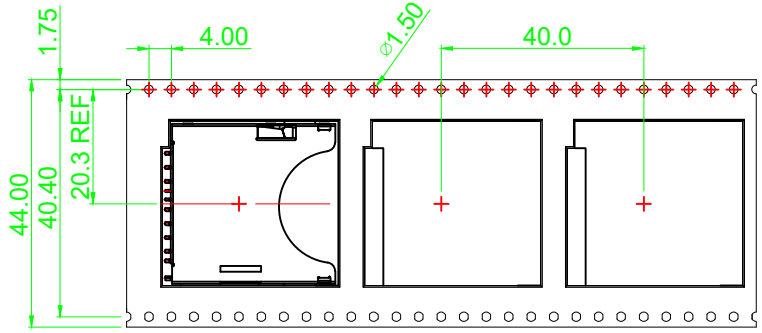



NOTES:


1.PACKING : 350 PCS/REEL
2,100 PCS/OUTER CARTON
2.MATERIAL: CARRIER TAPE: PS BLACK
COVER TAPE: PET FILM
REEL: PLASTIC
3.PEEL STRENGTH OF COVER TAPE:
20~120g(PEEL SPEED 300mm/MINUTE)

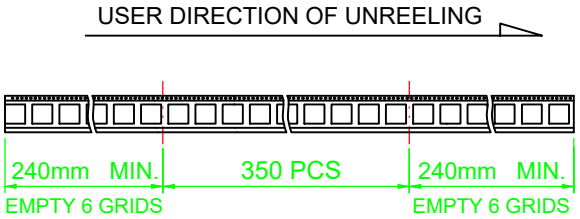

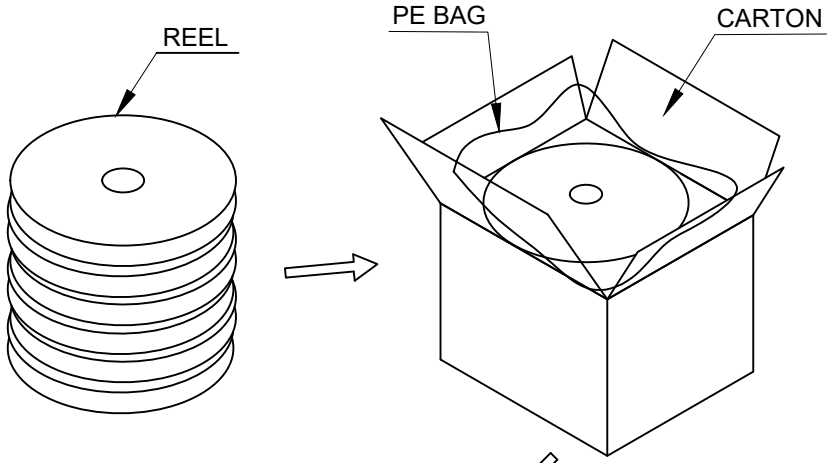

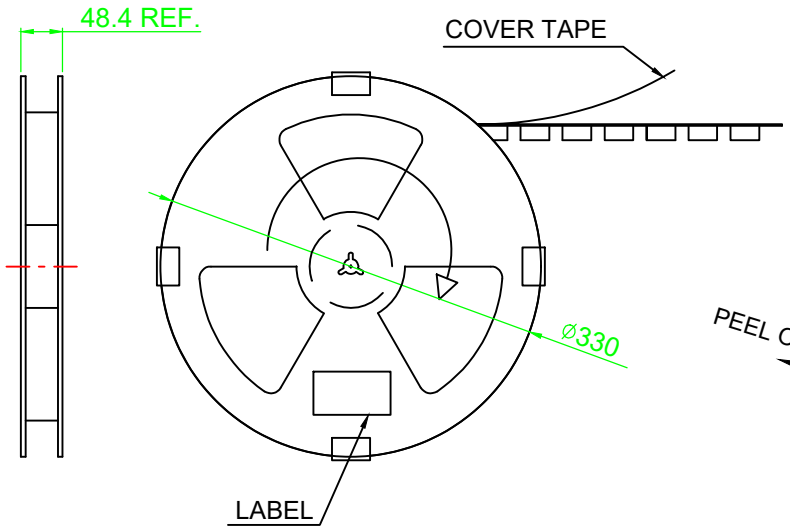

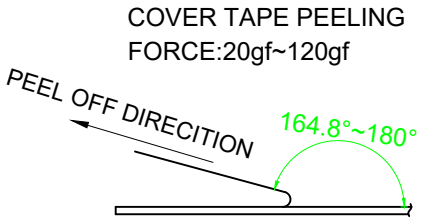

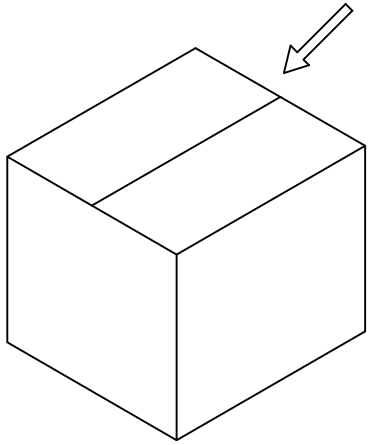

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 2 OF 2	REV.: A	NAME	SD Push-Push Type w/SW H:2.8mm Packing
				CHECKED	Sunny	DATE: 2021/03/03		PART NO.	SD-0110000 DWG NO. SD-0110000_01
				DRAWN	Juno				