




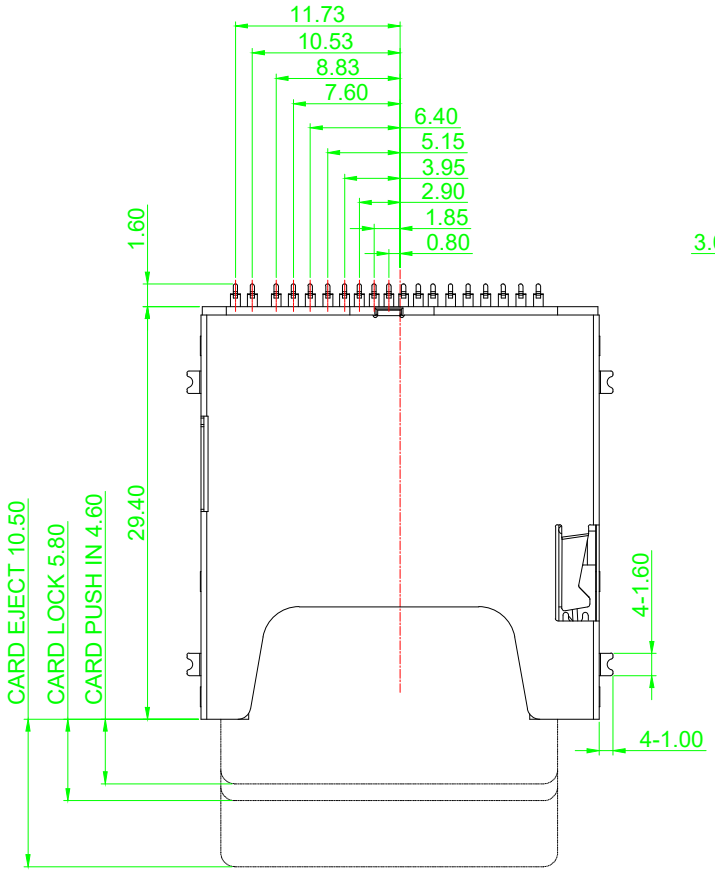

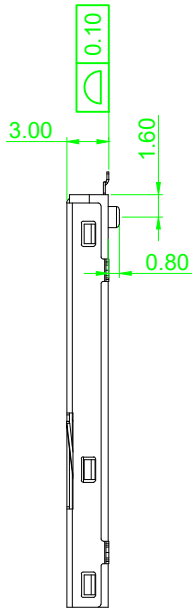

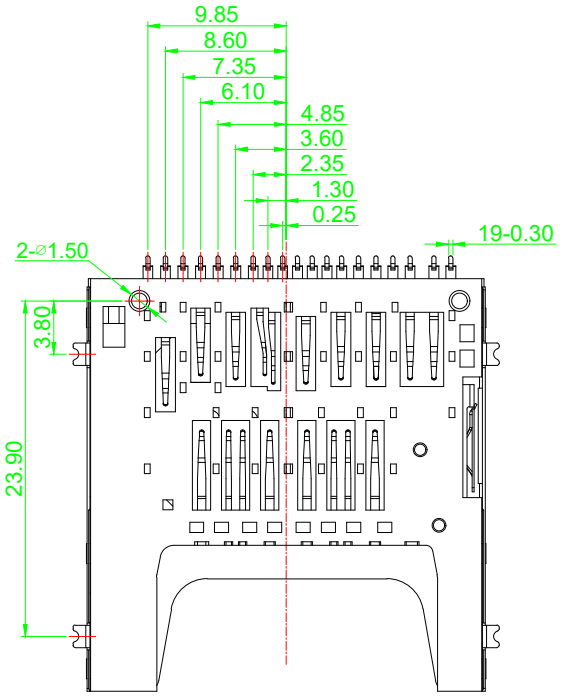

NOTES:
1.MATERIAL:
- HOUSING: LCP, UL94V-0, BLACK
- SLIDE: LCP, UL94V-0, BLACK
- CONTACT: PHOSPHOR BRONZE
- SHELL: SUS304
- SPRING: PIANO WIRE


2.FINISH:
- CONTACT:
  - CONTACT AREA: G/F GOLD PLATED
  - SOLDER AREA: TIN PLATED
  - UNDER PLATING: NICKEL PLATED

3.SPECIFICATION:
- CURRENT RATING: 1A / (1PIN)
- VOLTAGE RATING: 250V AC/DC
- DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE
- CONTACT RESISTANCE: 100mΩ MAX.
- INSULATION RESISTANCE: 1000MΩ MIN.
- OPERATING TEMPERATURE: -25°C ~ +85°C
- DURABILITY: 5,000 CYCLES MIN.
- INSERTION FORCE: 40N MAX.
- WITHDRAWAL FORCE: 2N

CARD DETECT	7 ○—/—○ 8 CARD OUT	7 ○—┘—○ 8 CARD INSERT
WRITE PROTECT	19 ○—/—○ GND WRITE PROTECTED	19 ○—┘—○ GND WRITE ENABLE


PIN ASSIGNMENT

PIN NO.	NAME	PIN NO.	NAME
1	VSS3	11	VDD1
2	DAT2	12	D1-
3	D0+	13	CLK
4	CD/DAT3	14	D1+
5	D0-	15	VSS2
6	CMD	16	VSS5
7	CD	17	DAT0
8	VSS1	18	DAT1
9	VSS4	19	WP
10	VDD2		

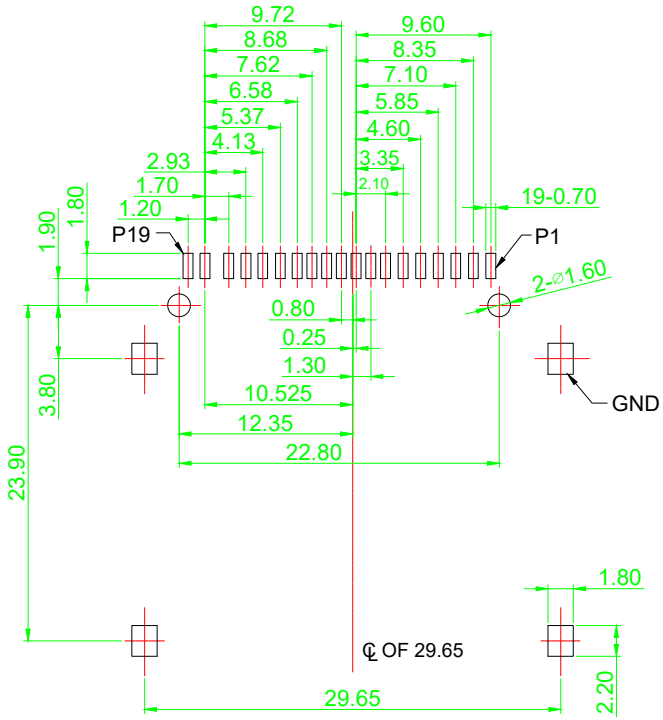



RECOMMENDED PCB LAYOUT (TOLERANCE: ±0.05)

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 1 OF 2	REV.: A	NAME	SD 4.0 Push-Push Type w/SW H:3.0mm
				CHECKED	Sunny				
				DRAWN	Juno	DATE: 2022/03/08		PART NO.	SD4-0113000 / DWG NO. SD4-0113000_01

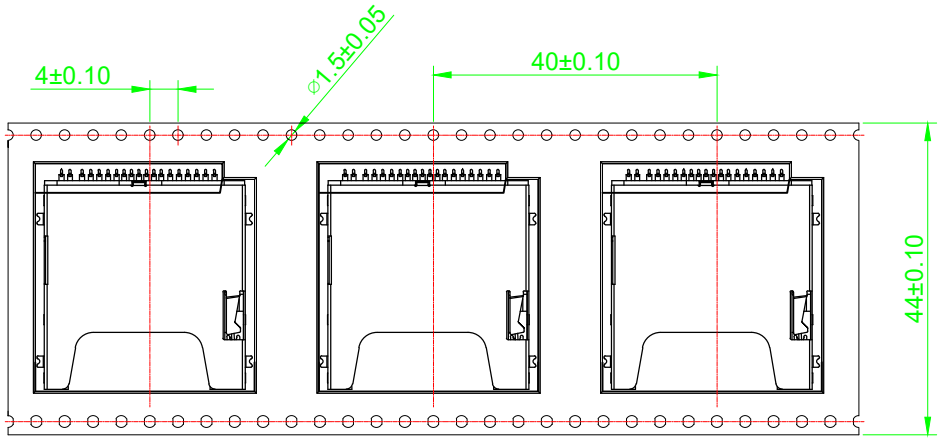

USER DIRECTION OF UNREELING

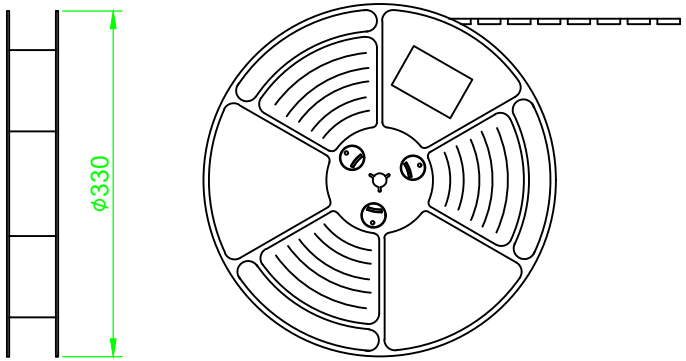

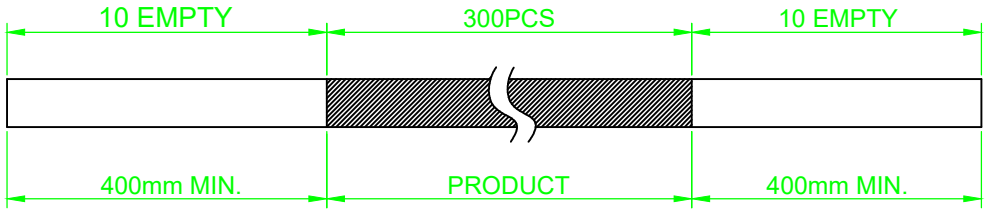


NOTES:

1.PACKING: 300 PCS/REEL
1,800 PCS/OUTER CARTON

2.MATERIAL: CARRIER TAPE: PS BLACK
COVER TAPE: PET FILM
REEL: PLASTIC

3.PEEL STRENGTH OF COVER TAPE:
20~80g(PEEL SPEED 300mm/MINUTE)

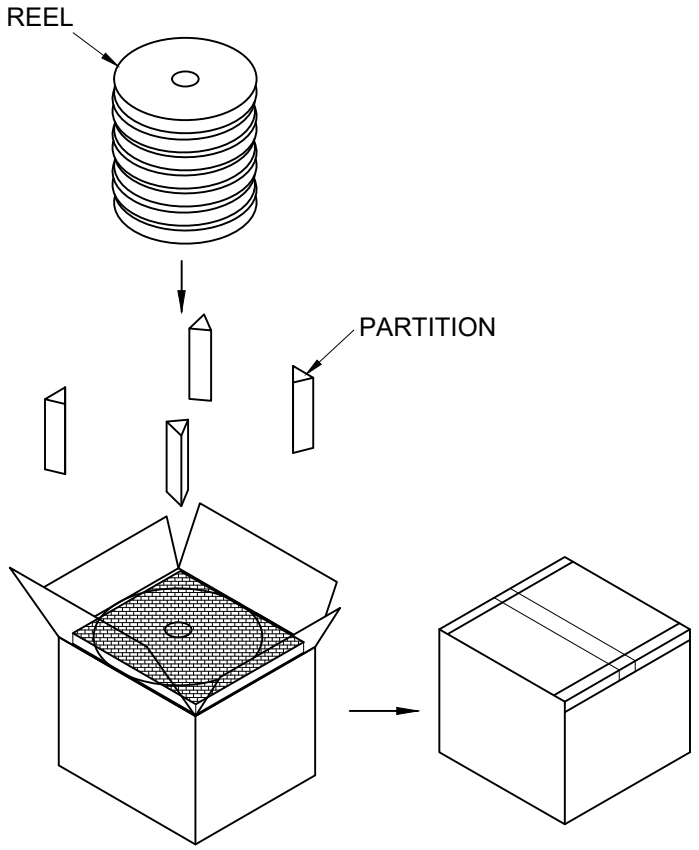

研膳國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 2 OF 2	REV.: A	NAME	SD 4.0 Push-Push Type w/SW H:3.0mm Packing	
				CHECKED	Sunny					
				DRAWN	Juno	DATE: 2022/03/08		PART NO.	SD4-0113000	DWG NO. SD4-0113000_01