


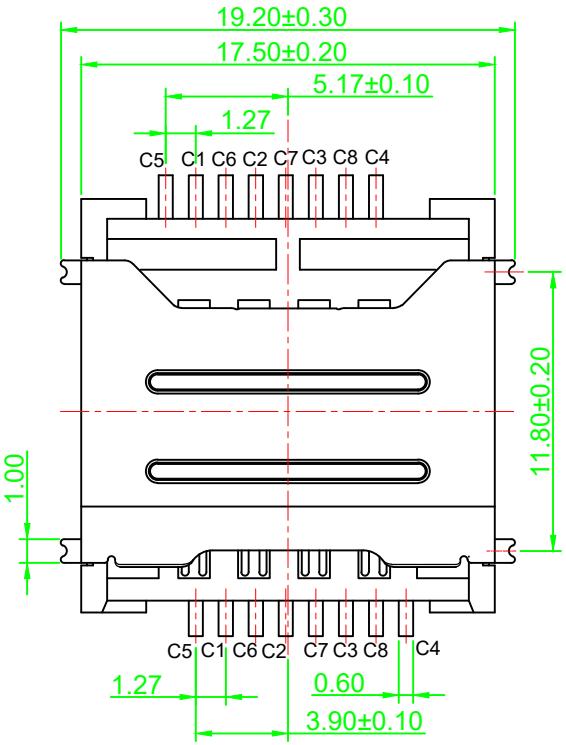


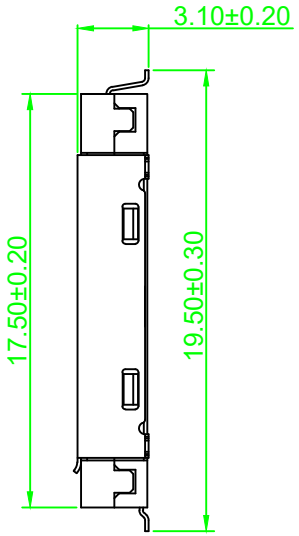

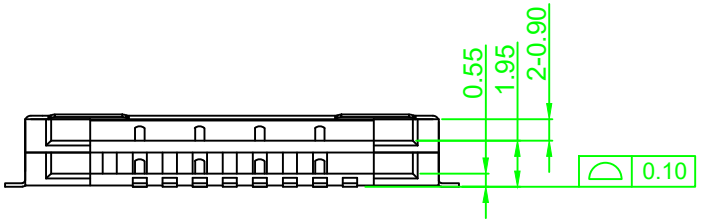




SIM CARD

SIM PIN ASSIGNMENT	
PIN NO.	NAME
C1	VCC
C2	RST
C3	CLK
C4	N/A
C5	GND
C6	VPP
C7	I/O
C8	N/A

NOTES:
1.MATERIAL:
- HOUSING: LCP, UL94V-0, BLACK
- CONTACT: PHOSPHOR BRONZE
- SHELL: STAINLESS STEEL

2.FINISH:
- CONTACT:
  - CONTACT AREA: G/F GOLD PLATED
  - SOLDER AREA: G/F GOLD PLATED
  - UNDER PLATING: NICKEL PLATED
- SHELL:
  - SOLDER AREA: G/F GOLD PLATED
  - UNDER PLATING: NICKEL PLATED


3.SPECIFICATION:
- CURRENT RATING: 1A / (1PIN)
- VOLTAGE RATING: 50V AC/DC
- DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE
- CONTACT RESISTANCE: 50mΩ MAX.
- INSULATION RESISTANCE: 1000MΩ MIN.
- OPERATING TEMPERATURE: -25°C ~ +85°C
- DURABILITY: 5000 CYCLES MIN.
- CONTACT RETENTION: 2.5N MIN.
- INSERTION FORCE: 10N MAX.
- WITHDRAWAL FORCE: 10N MAX.

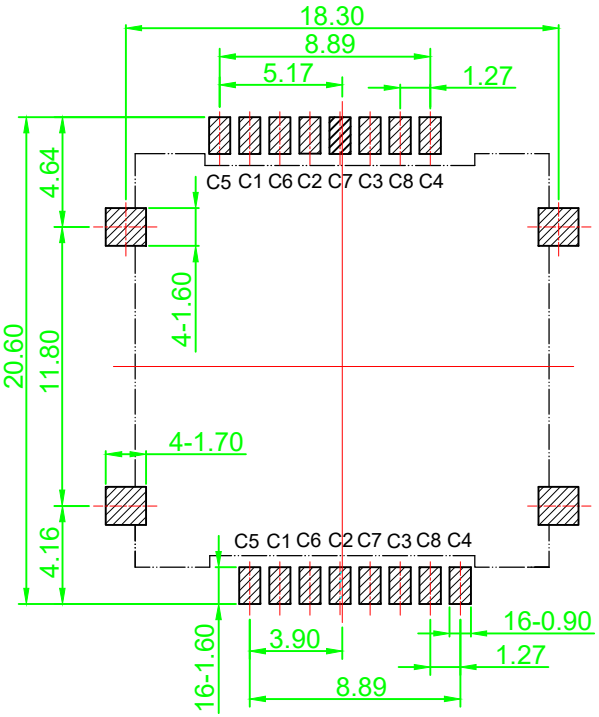

RECOMMENDED PCB LAYOUT (TOLERANCE:±0.05)


研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm	GENERAL TOLERANCES: .X ±0.30 X°. ±3° .XX ±0.20 .X° ±1° .XXX ±0.10	APPROVED	David	SHEET: 1 OF 2	REV.: A	NAME	SIM Dual Stacked(2x1) Push-Pull Type 8Pin H:3.1mm
		SCALE: Free		CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/03/16		PART NO.	SIM-01D20080 DWG NO. SIM-01D20080_01

Rev.	Description.	Date	App.
01			

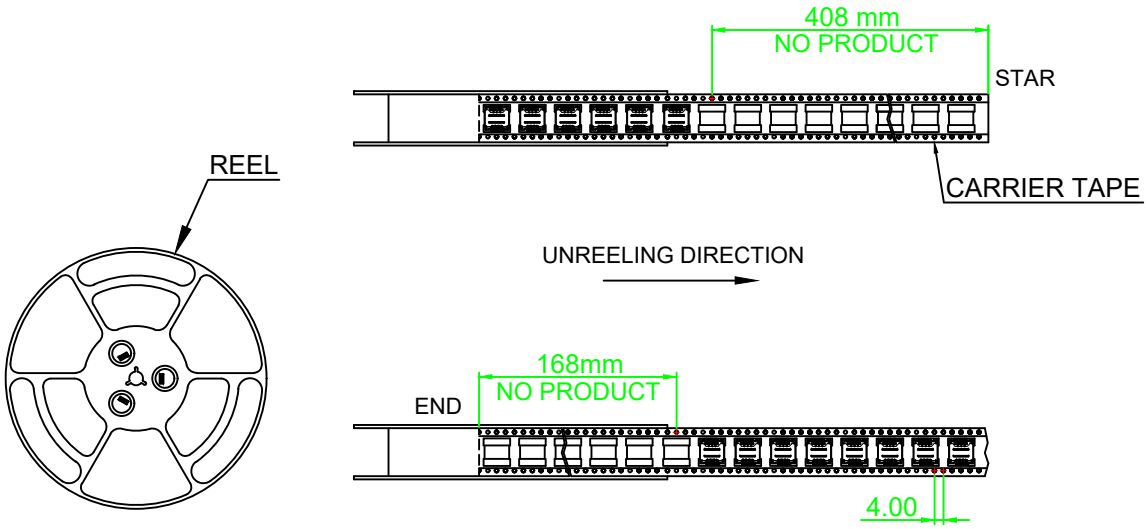

NOTES:

1.PACKING: 700 PCS/REEL
5,600 PCS/OUTER CARTON
2.MATERIAL: CARRIER TAPE: PS BLACK
COVER TAPE: PET FILM
REEL: PLASTIC
3.PEEL STRENGTH OF COVER TAPE:
20~80g(PEEL SPEED 300mm/MINUTE)
4.G/W: 10.7 Kg , N/W: 4.9 Kg

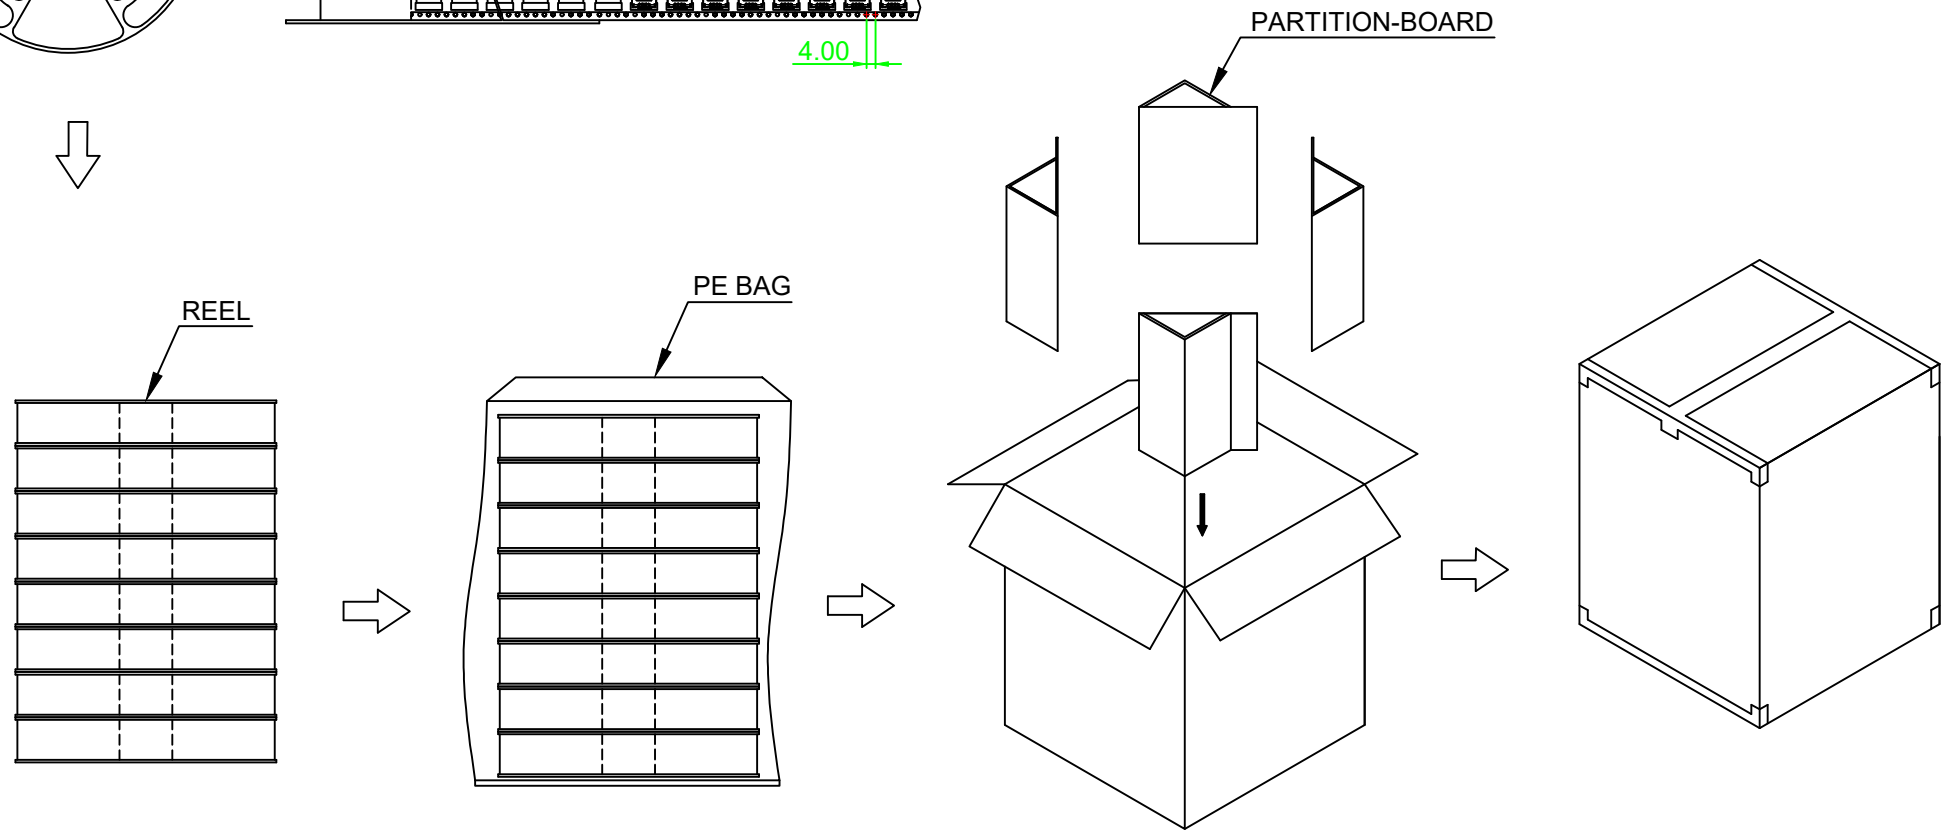

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ±3° .XX ±0.20 .X° ±1° .XXX ±0.10	APPROVED	David	SHEET: 2 OF 2	REV.: A	NAME	SIM Dual Stacked(2x1) Push-Pull Type 8Pin H:3.1mm Packing
				CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/03/16		PART NO.	SIM-01D20080 / DWG NO. SIM-01D20080_01