




Rev.	Description.	Date	App.
01			




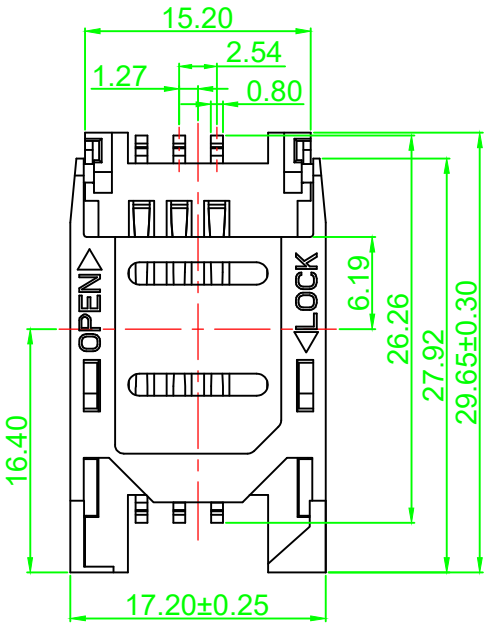


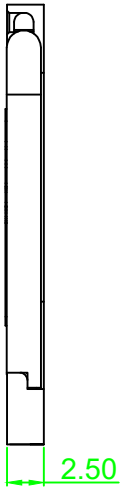

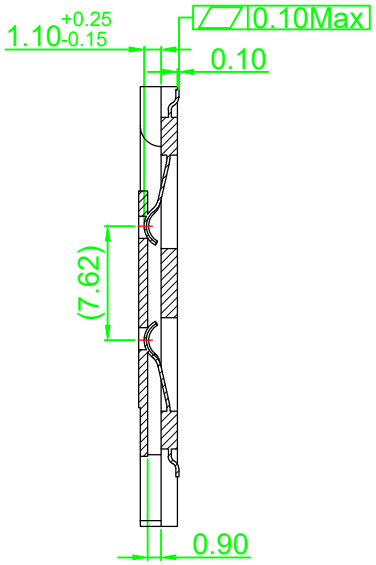



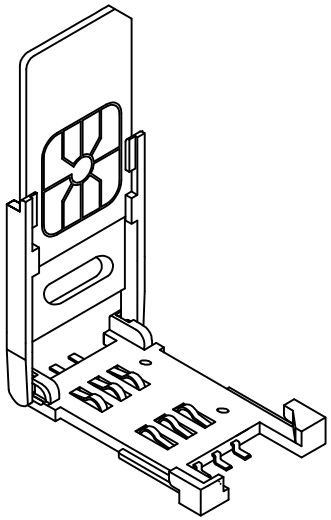

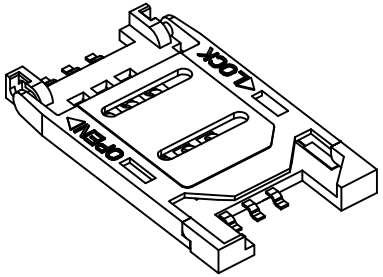


SIM PIN ASSIGNMENT	
PIN NO.	NAME
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED

NOTES:
1.MATERIAL:
HOUSING: LCP, UL94V-0, BLACK
CONTACT: PHOSPHOR BRONZE

2.FINISH:
CONTACT:
CONTACT AREA: G/F GOLD PLATED
SOLDER AREA: TIN PLATED
UNDER PLATING: NICKEL PLATED

3.SPECIFICATION:
CURRENT RATING: 0.5A MAX.
VOLTAGE RATING: 30V AC/DC
DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE
CONTACT RESISTANCE: 30mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN.
OPERATING TEMPERATURE: -40°C ~ +85°C
DURABILITY: 5000 CYCLES MIN.

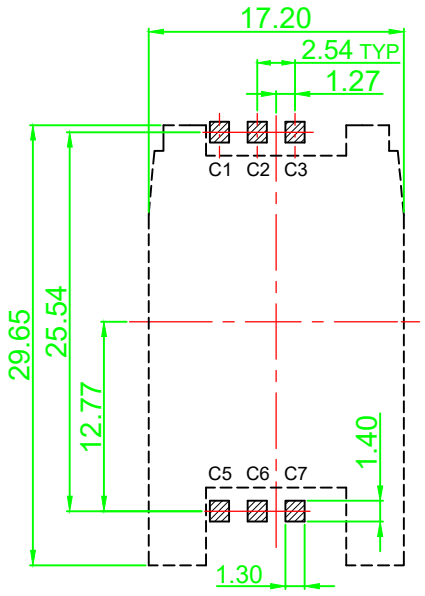


RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

研騰國際企業股份有限公司
YANNIS ELECTRONICS CO.,LTD.

PROJECTION:	UNIT: mm	GENERAL TOLERANCES:				APPROVED	David	SHEET: 1 OF 2	REV.: A	NAME	SIM Hinge Type 6Pin H:2.5mm w/o Post		
	SCALE: Free	.X	±0.30	X°.	±3°	CHECKED	Sunny						
		.XX	±0.20	.X°	±1°	DRAWN	Juno	DATE: 2021/03/11		PART NO.	SIM-0103060	DWG NO.	SIM-0103060_01
		.XXX	±0.10										

Rev.	Description.	Date	App.
01			

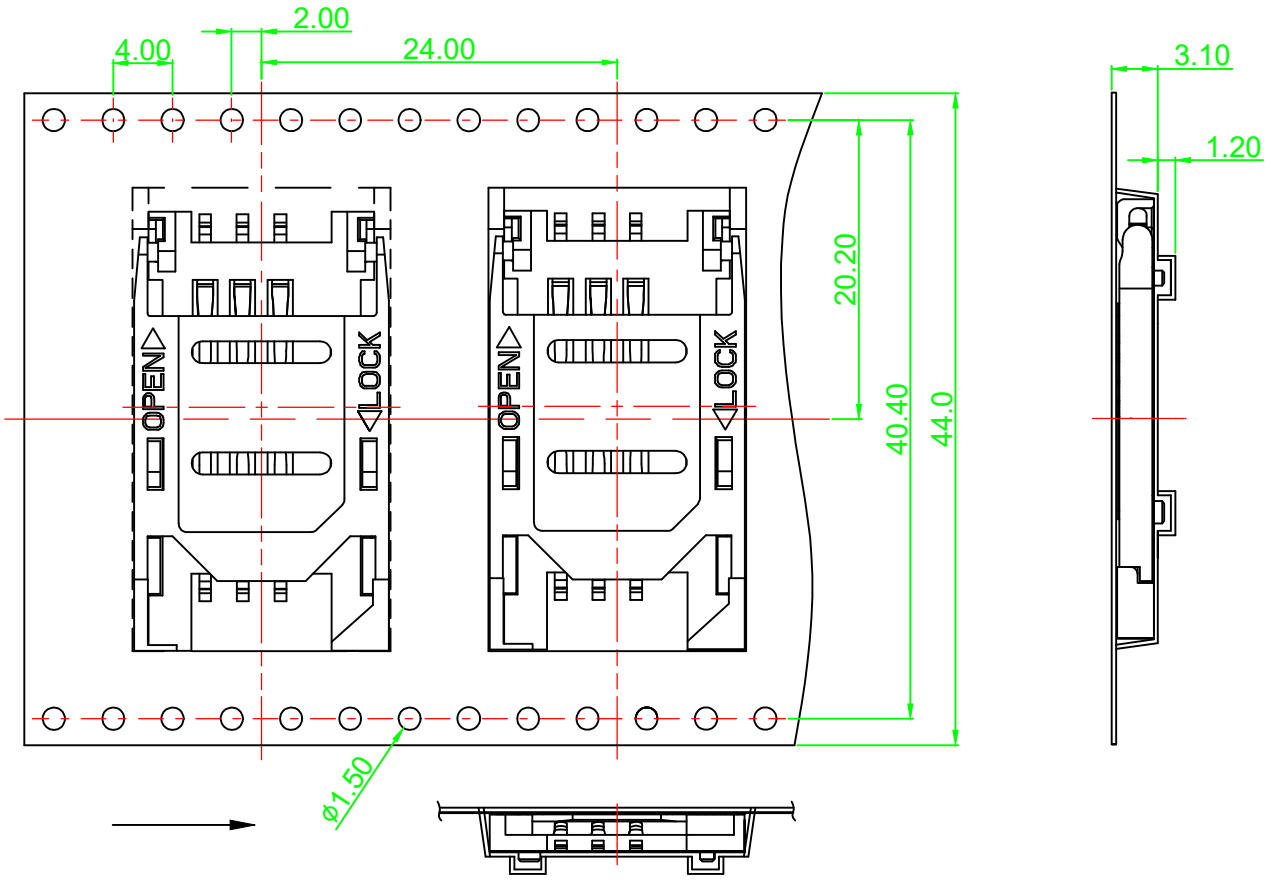


NOTES:


1.PACKING: 800 PCS/REEL
4,800 PCS/OUTER CARTON


2.MATERIAL: CARRIER TAPE: PS
COVER TAPE: PET FILM
REEL: PLASTIC


3.PEEL STRENGTH OF COVER TAPE:
20~130g(PEEL SPEED 300mm/MINUTE)

4.G/W: 8.5 Kg , N/W: 4.6 Kg

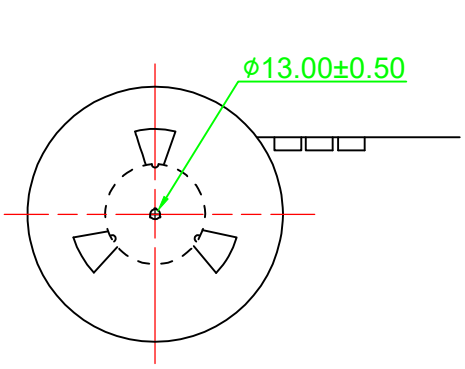

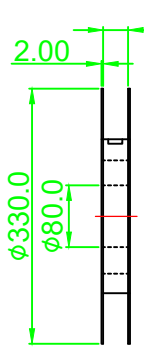

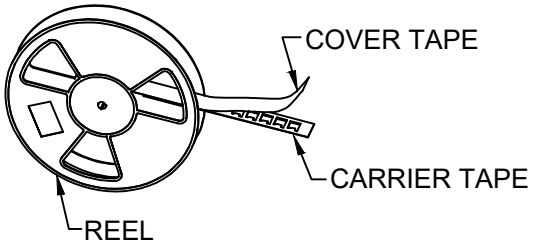

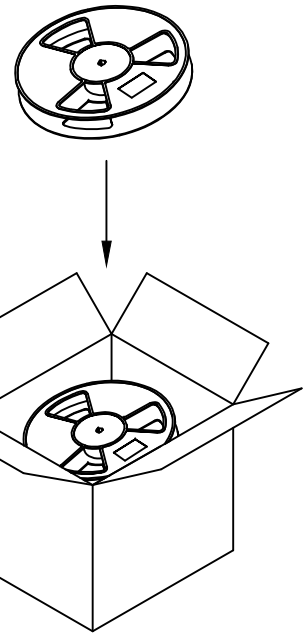

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ±3° .XX ±0.20 .X° ±1° .XXX ±0.10	APPROVED	David	SHEET: 2 OF 2	REV.: A	NAME	SIM Hinge Type 6Pin/8Pin H:2.5mm Packing
				CHECKED	Sunny	DATE: 2021/03/11		PART NO.	SIM-010X0X0 DWG NO. SIM-010X0X0_01
				DRAWN	Juno				