



Rev.	Description.	Date	App.
01			



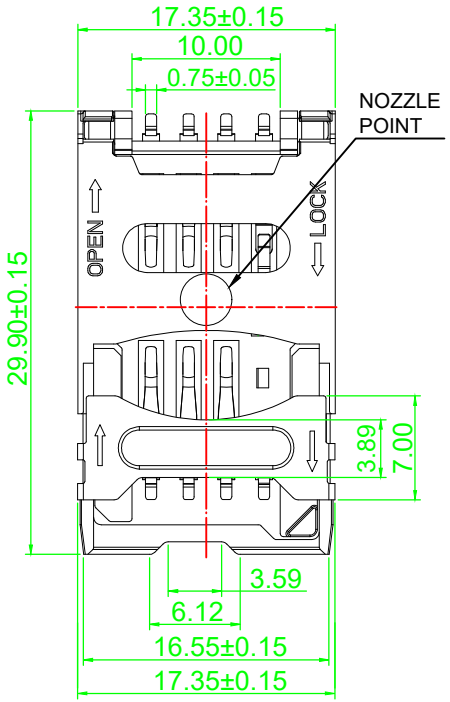

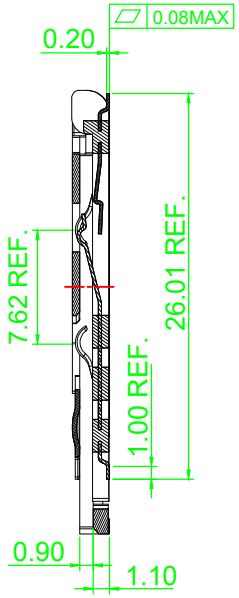


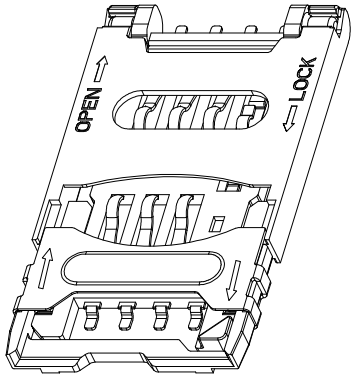


NOTES:
1.MATERIAL:
HOUSING: LCP, UL94V-0, BLACK
CONTACT: PHOSPHOR BRONZE
SLIDER LOCKED: STAINLESS STEEL

2.FINISH:
CONTACT:
CONTACT AREA: G/F GOLD PLATED
SOLDER AREA: TIN PLATED
UNDER PLATING: NICKEL PLATED

3.SPECIFICATION:
CURRENT RATING: 0.5A MAX.
VOLTAGE RATING: 30V AC/DC
DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE
CONTACT RESISTANCE: 30mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN.
OPERATING TEMPERATURE: -40°C ~ +85°C
DURABILITY: 5000 CYCLES MIN.

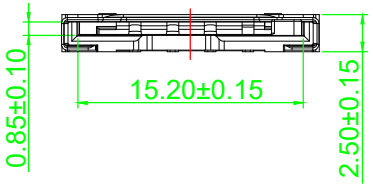


ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	OPEN
CARD INSERTED	CLOSED



SWITCH OPERATION DIAGRAM

PIN NO.	NAME
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED

SIM PIN ASSIGNMENT

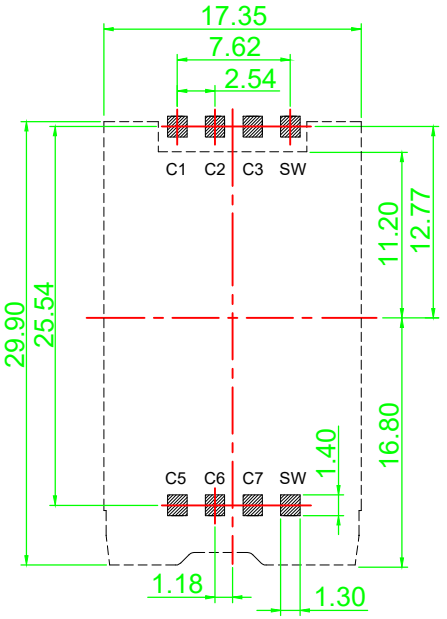



RECOMMENDED PCB LAYOUT (TOLERANCE:±0.05)

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X° ±3° .XX ±0.20 .X° ±1° .XXX ±0.10	APPROVED	David	SHEET: 1 OF 2	REV.: A	NAME	SIM Hinge Type 6Pin H:2.5mm w/SW w/o Post
				CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/03/24		PART NO.	SIM-0106060 DWG NO. SIM-0106060_01

Rev.	Description.	Date	App.
01			

PULL OUT DIRECTION →

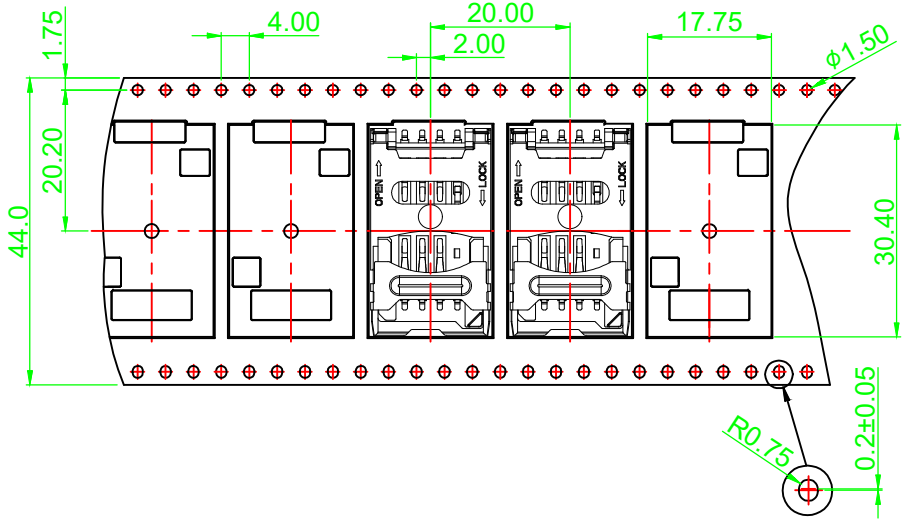

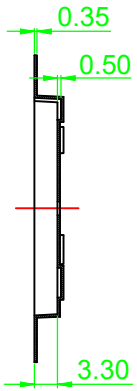


NOTES:


1.PACKING: 900 PCS/REEL
5,400 PCS/OUTER CARTON


2.MATERIAL: CARRIER TAPE: PS
COVER TAPE: PET FILM
REEL: PLASTIC


3.PEEL STRENGTH OF COVER TAPE:
20~130g(PEEL SPEED 300mm/MINUTE)


4.G/W: 10.2kg

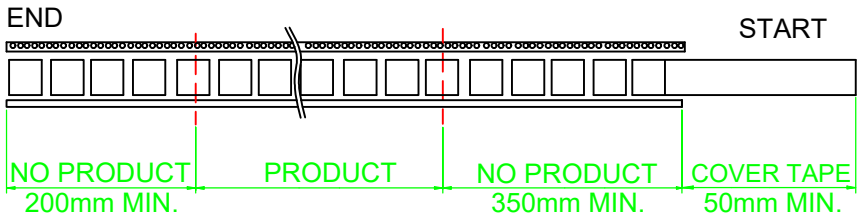

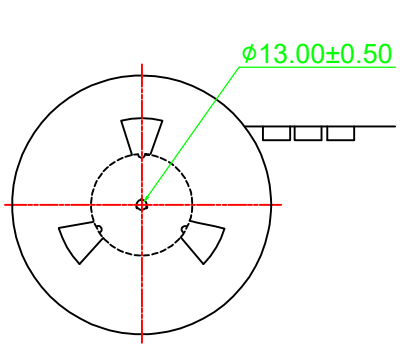



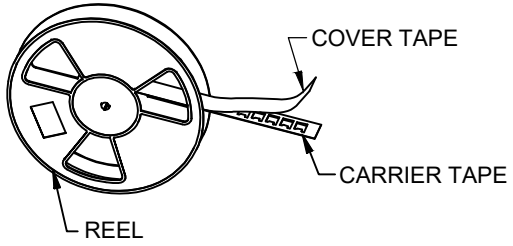

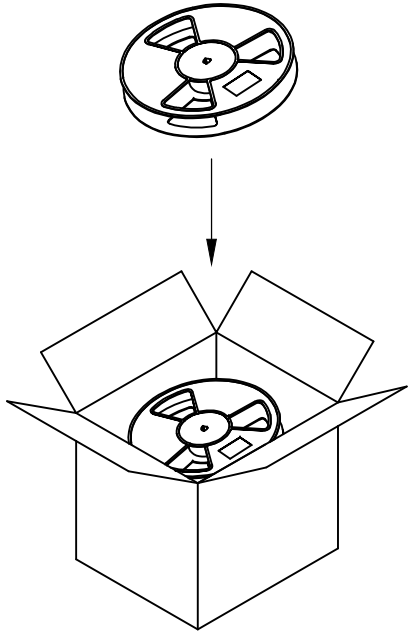

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ±3° .XX ±0.20 .X° ±1° .XXX ±0.10	APPROVED	David	SHEET: 2 OF 2	REV.: A	NAME	SIM Hinge Type 6Pin H:2.5mm w/SW w/o Post Packing
				CHECKED	Sunny	DATE: 2021/03/24		PART NO.	SIM-0106060 DWG NO. SIM-0106060_01
				DRAWN	Juno				