

Rev.	Description.	Date	App.
01			

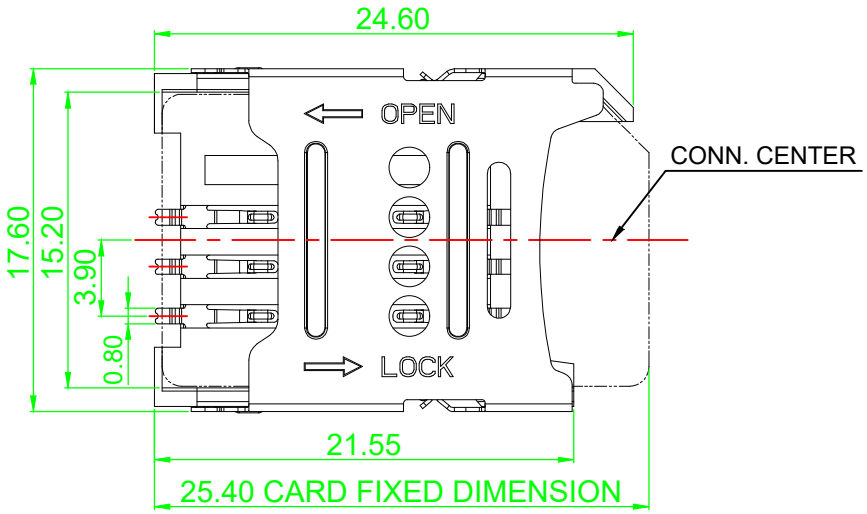


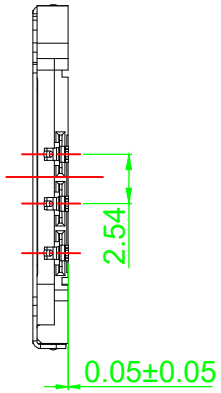



NOTES:
1.MATERIAL:
- HOUSING: LCP, UL94V-0, BLACK
- CONTACT: PHOSPHOR BRONZE
- SHELL: STAINLESS STEEL


2.FINISH:
- CONTACT:
  - CONTACT AREA: G/F GOLD PLATED
  - SOLDER AREA: TIN PLATED
  - UNDER PLATING: NICKEL PLATED


3.SPECIFICATION:
- CURRENT RATING: 1A MAX.
- VOLTAGE RATING: 30V AC/DC
- DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE
- CONTACT RESISTANCE: 30mΩ MAX.
- INSULATION RESISTANCE: 1000MΩ MIN.
- OPERATING TEMPERATURE: -25°C ~ +85°C
- DURABILITY: 5000 CYCLES MIN.

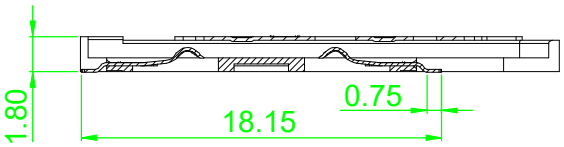




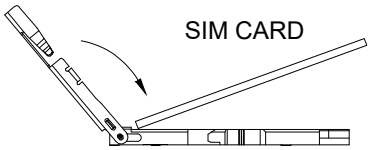








SIM CARD


SIM PIN ASSIGNMENT	
PIN NO.	NAME
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED

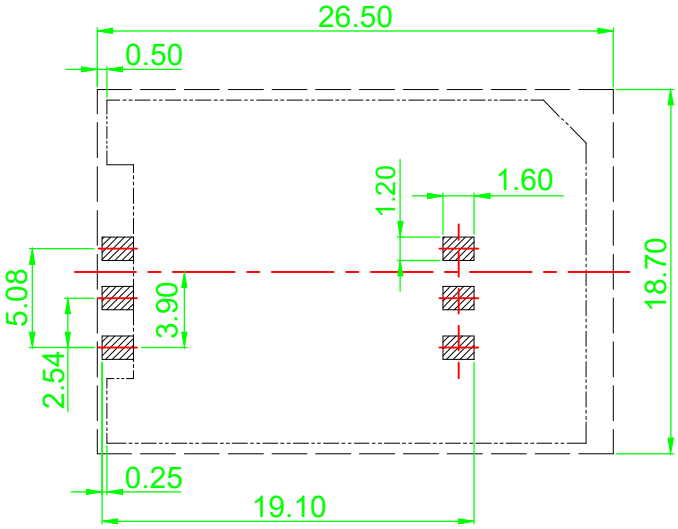

RECOMMENDED PCB LAYOUT(TOP VIEW)
TOLERANCE:±0.05
PAD AREA KEEP OUT AREA

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm	GENERAL TOLERANCES: .X ±0.30 X°. ±3° .XX ±0.20 .X° ±1° .XXX ±0.10	APPROVED	David	SHEET: 1 OF 2	REV.: A	NAME	SIM Hinge Type 6Pin H:1.8mm w/o Post
		SCALE: Free		CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/04/15		PART NO.	SIM-0115061 DWG NO. SIM-0115061_01

Rev.	Description.	Date	App.
01			

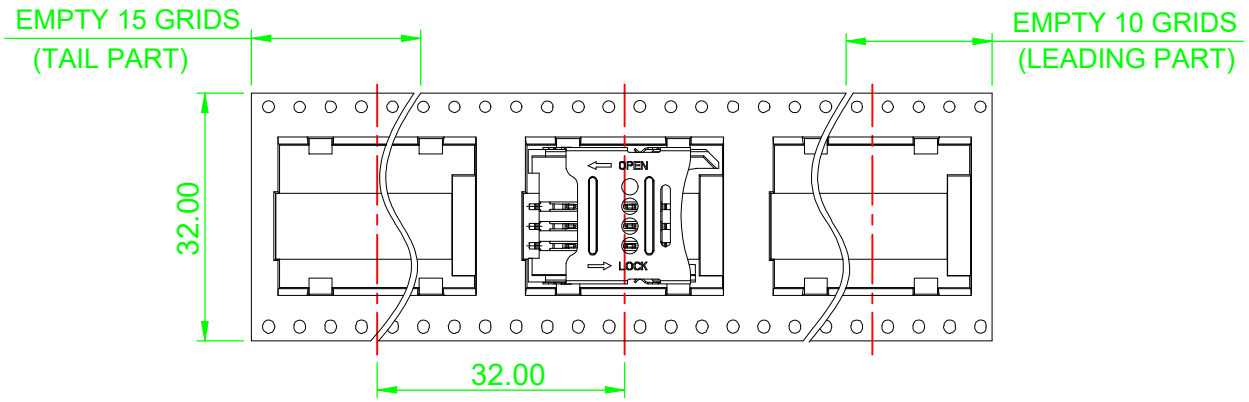

收料方向

GATHER MATERIAL DIRECTION


NOTES:


1.PACKING: 600 PCS/REEL
5,400 PCS/OUTER CARTON


2.MATERIAL: CARRIER TAPE: PS
COVER TAPE: PET FILM
REEL: PLASTIC


3.PEEL STRENGTH OF COVER TAPE:
20~130g(PEEL SPEED 300mm/MINUTE)

4.G/W: 10.2 Kg

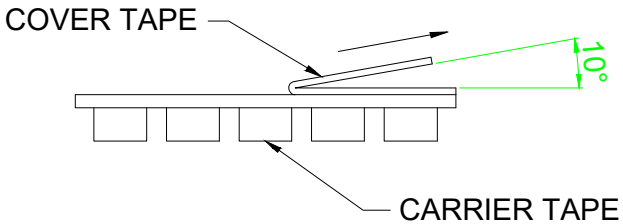

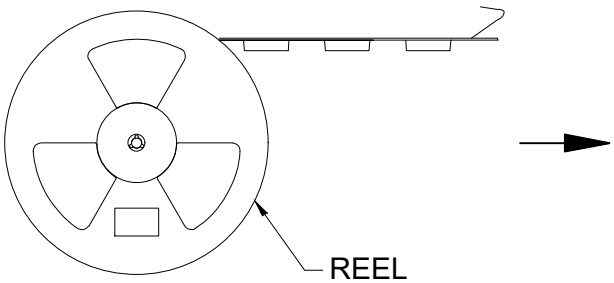

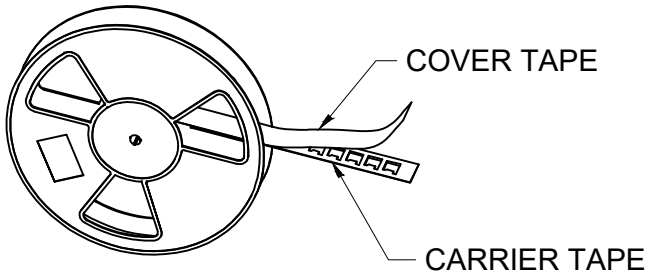

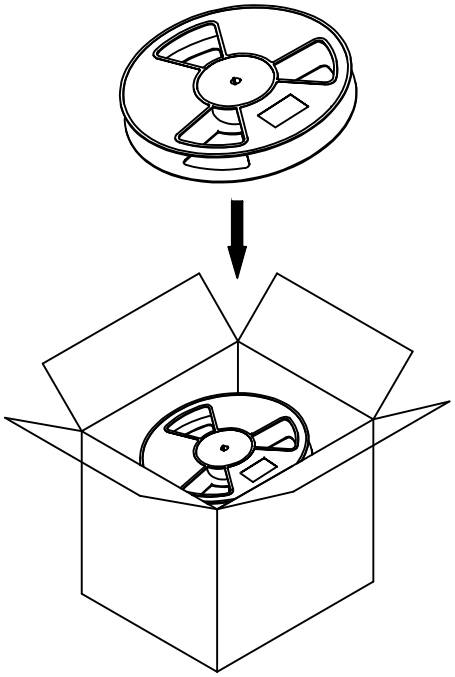

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ±3° .XX ±0.20 .X° ±1° .XXX ±0.10	APPROVED	David	SHEET: 2 OF 2	REV.: A	NAME	SIM Hinge Type 6Pin H:1.8mm w/o Post Packing
				CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/04/15		PART NO.	SIM-0115061 DWG NO. SIM-0115061_01