


Rev.	Description.	Date	App.
01			

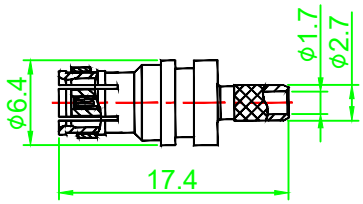








PART NO.:
FKR-Kx200JC-01

CODE REFERENCE CHART:


CODE		CODE	
A	Black 9005 Radio without phantom supply	Violet 4003 GPS for telematics and navigation	H
B	Cream white 9001 Radio phantom supply	Beige 1001 Remote control parking heating	I
C	Blue 5005 GPS	Curry 1027 Radio with IF	K
D	Bordeaux 4004 GSM cellular phone	Carmine red 3002 Not defined	L
E	Green 6002 TV1 / SDARS	Pastel orange 2003 Not defined	M
F	Brown 8011 TV2 / SDARS	Pastel green 6019 Not defined	N
G	Grey 7031 Remote control keyless entry	Water blue 5021 Neutral coding	Z









Overveiw



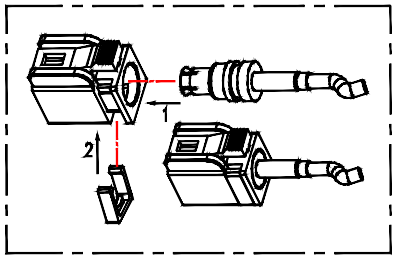

Assembly Housing Process



Recommended Stripping

NOTES: TYPICAL SPECIFICATIONS

1.0. ELECTRICAL DATA
- 1.1. FREQUENCY RANGE : DC 6 GHz
- 1.2. IMPEDANC : 50 Ohms
- 1.3. VSWR : < 1.3
- 1.4. DIELECTRIC WITHSTANDING VOLTAGE : 750 Vrms
- 1.5. INSULATION RESISTANCE : 1000 Mega-Ohms
- 1.6. CENTER CONTACT RESISTANCE : [20+L(mm)*0.5] mini-Ohms
- 1.7. OUTER CONTACT RESISTANCE : [12+L(mm)*0.5] mini-Ohms

2.0. MECHANICAL DATA
- 2.1. COUPLING METHOD : Snap-on
- 2.2. DURABILITY (MATING/ UNMATING) : 100 Cycles
- 2.3. ENGAGEMENT FORCE : 25N max.
- 2.4. DISENGAGEMENT FORCE : 2N min.

Item/N	Material	Finish
C-Ring	SWC	Nickel
Housing	Nylon	By Code Color
Lock Ring	Nylon	By Code Color
Sleeve	Brass	Nickel
Female Insulator	Teflon	
Female Conductor	Phosphor Bronze	Gold
Jack Body	Brass	Nickel

研騰國際企業股份有限公司
YANNIS ELECTRONICS CO.,LTD.

PROJECTION:	UNIT: mm	GENERAL TOLERANCES: X. ±0.25 X°. ±3° .X ±0.15 .X° ±2° .XX ±0.08	APPROVED	David	SHEET: 1 OF 1	REV.: A	NAME	FAKRA JACK STR. FOR RG316/RG174	
	SCALE: Free		CHECKED	Sunny					
			DRAWN	Juno	DATE: 2021/01/27		PART NO.	FKR-Kx200JC-01	DWG NO. FKR-Kx200JC-01_01